


■ General Dimensions Unit: mm

IH \ CH560T

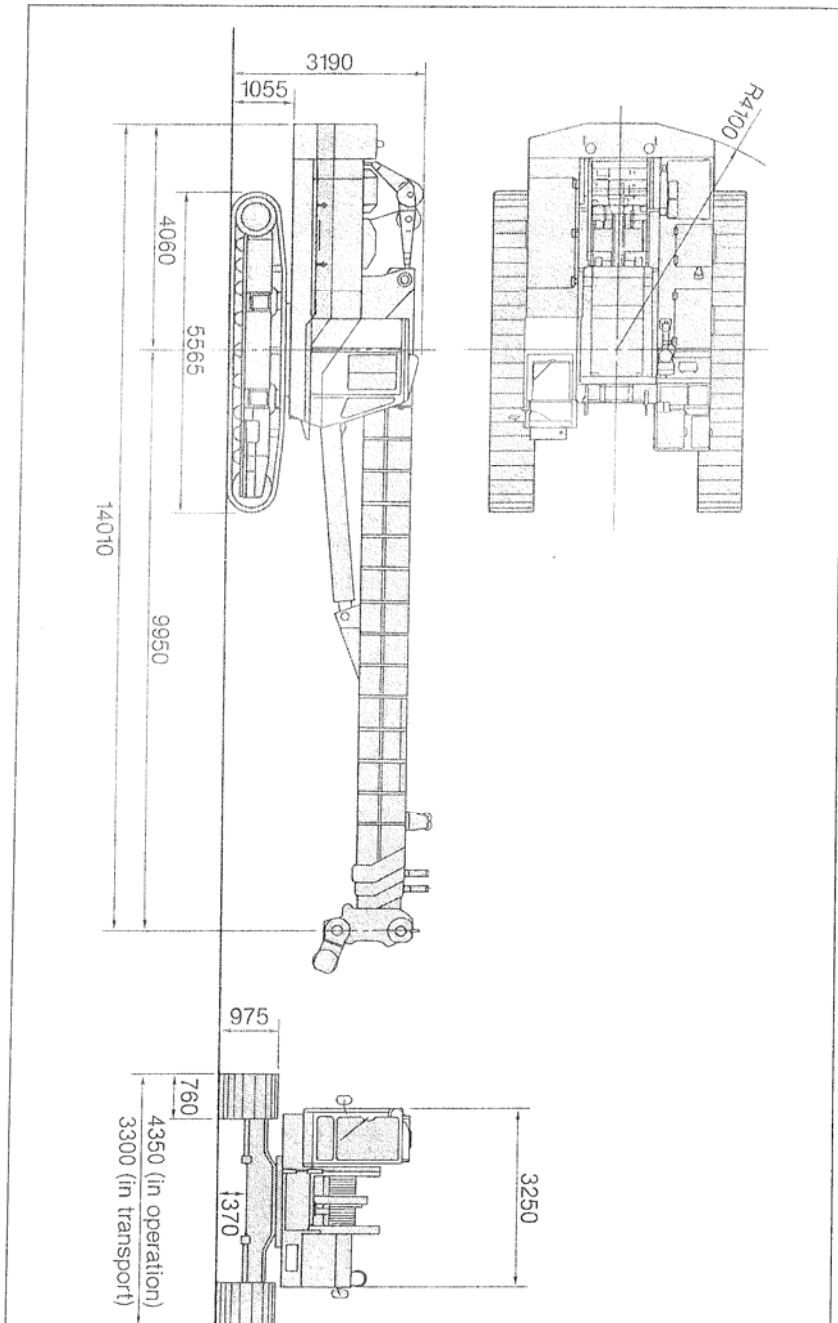

The values change depending on the load.

The main hook while the 6.7/11.0m jib with the jib hook is attached.

Rated Lifting Loads Unit: metric ton


Working radius (m)	Boom length (m)		
	11.2	18.8	26.4
3.7	50.00	30.00	
4.0	43.50	30.00	
4.5	36.00	30.00	21.00
5.0	31.50	27.00	21.00
5.5	28.00	24.00	19.00
6.0	25.00	21.20	17.60
7.0	20.00	17.50	15.20
8.0	16.00	14.50	13.10
9.0	13.00	12.30	11.40
10.0	10.40	10.40	9.90
11.0	9.00	9.00	8.60
12.0	7.80	7.50	7.30
13.0	6.80	6.60	6.60
14.0	6.00	5.80	6.00
15.0	5.30	5.00	5.30
16.0	4.70	4.30	4.70
18.0	3.20	3.20	3.60
20.0	2.30	2.30	2.80
22.0	1.60	1.60	2.10
24.0	1.00	1.00	1.60
26.0	1.10	1.10	1.10
28.0			

Rated Lifting Loads (with jib option) Unit: metric ton

Boom angle	30m boom + 6.7m jib						34m boom + 11.0m jib					
	5° offset		17° offset		30° offset		5° offset		17° offset		30° offset	
	R	W	R	W	R	Wj	R	W	R	W	R	W
80°	8.3	3.00	9.8	2.50	10.9	2.00	9.6	2.00	11.9	1.60	13.8	1.00
78°	9.7	2.85	11.2	2.50	12.2	2.00	11.2	1.90	13.4	1.60	15.3	1.00
77°	10.4	2.80	11.9	2.50	12.9	2.00	11.9	1.85	14.1	1.60	16.6	1.00
75°	11.8	2.70	13.2	2.50	14.2	2.00	13.4	1.75	15.6	1.50	17.4	1.00
70°	15.1	2.35	16.5	2.20	17.6	2.00	17.1	1.55	19.2	1.30	20.8	0.90
65°	18.3	2.05	19.6	2.00	20.5	1.80	20.6	1.35	22.6	1.10	24.1	0.80
60°	21.4	1.75	22.6	1.75	23.3	1.60	24.0	1.15	25.8	0.90	27.2	0.70
55°	24.2	1.50	25.4	1.50	26.0	1.40	27.2	0.95	28.8	0.75		

*R shows the working radius.
*W shows the rated lifting loads.

IHI CCH500T

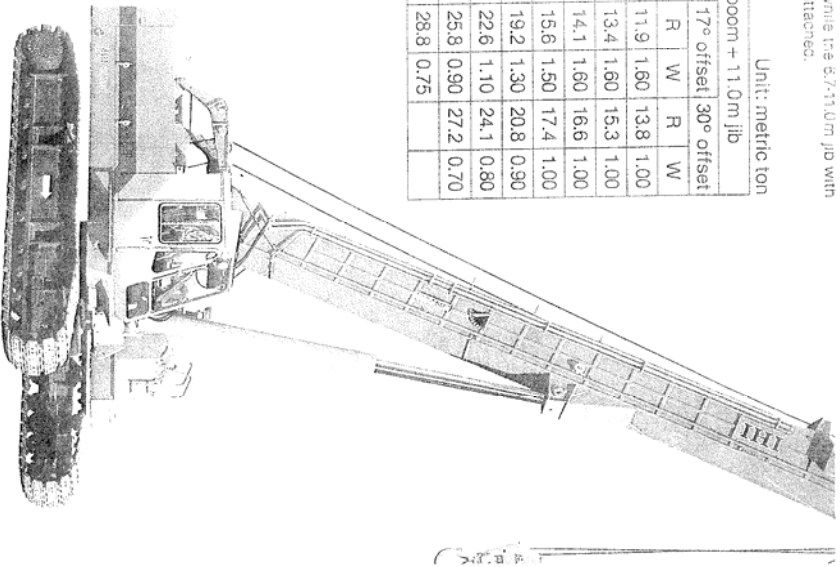

Ishikawajima Construction Machinery Co., Ltd.
9-7, Yaesu 2-chome, Chuo-ku, Tokyo 104, Japan
Telephone: 03-277-3975, Telex: 222-722-7231 IKTKY J, Telex: 03-277-4411

Specifications are subject to change without notice due to technical improvements or modifications.
Distributed by

(C) 1999.

141 CCH500T

Working Ranges

