

IHI

# CCH 1200


## Fully Hydraulic Crawler Crane

Lifting capacity 120 metric tons



**IHI Construction Machinery Limited**


**Luffing Jib Crane**

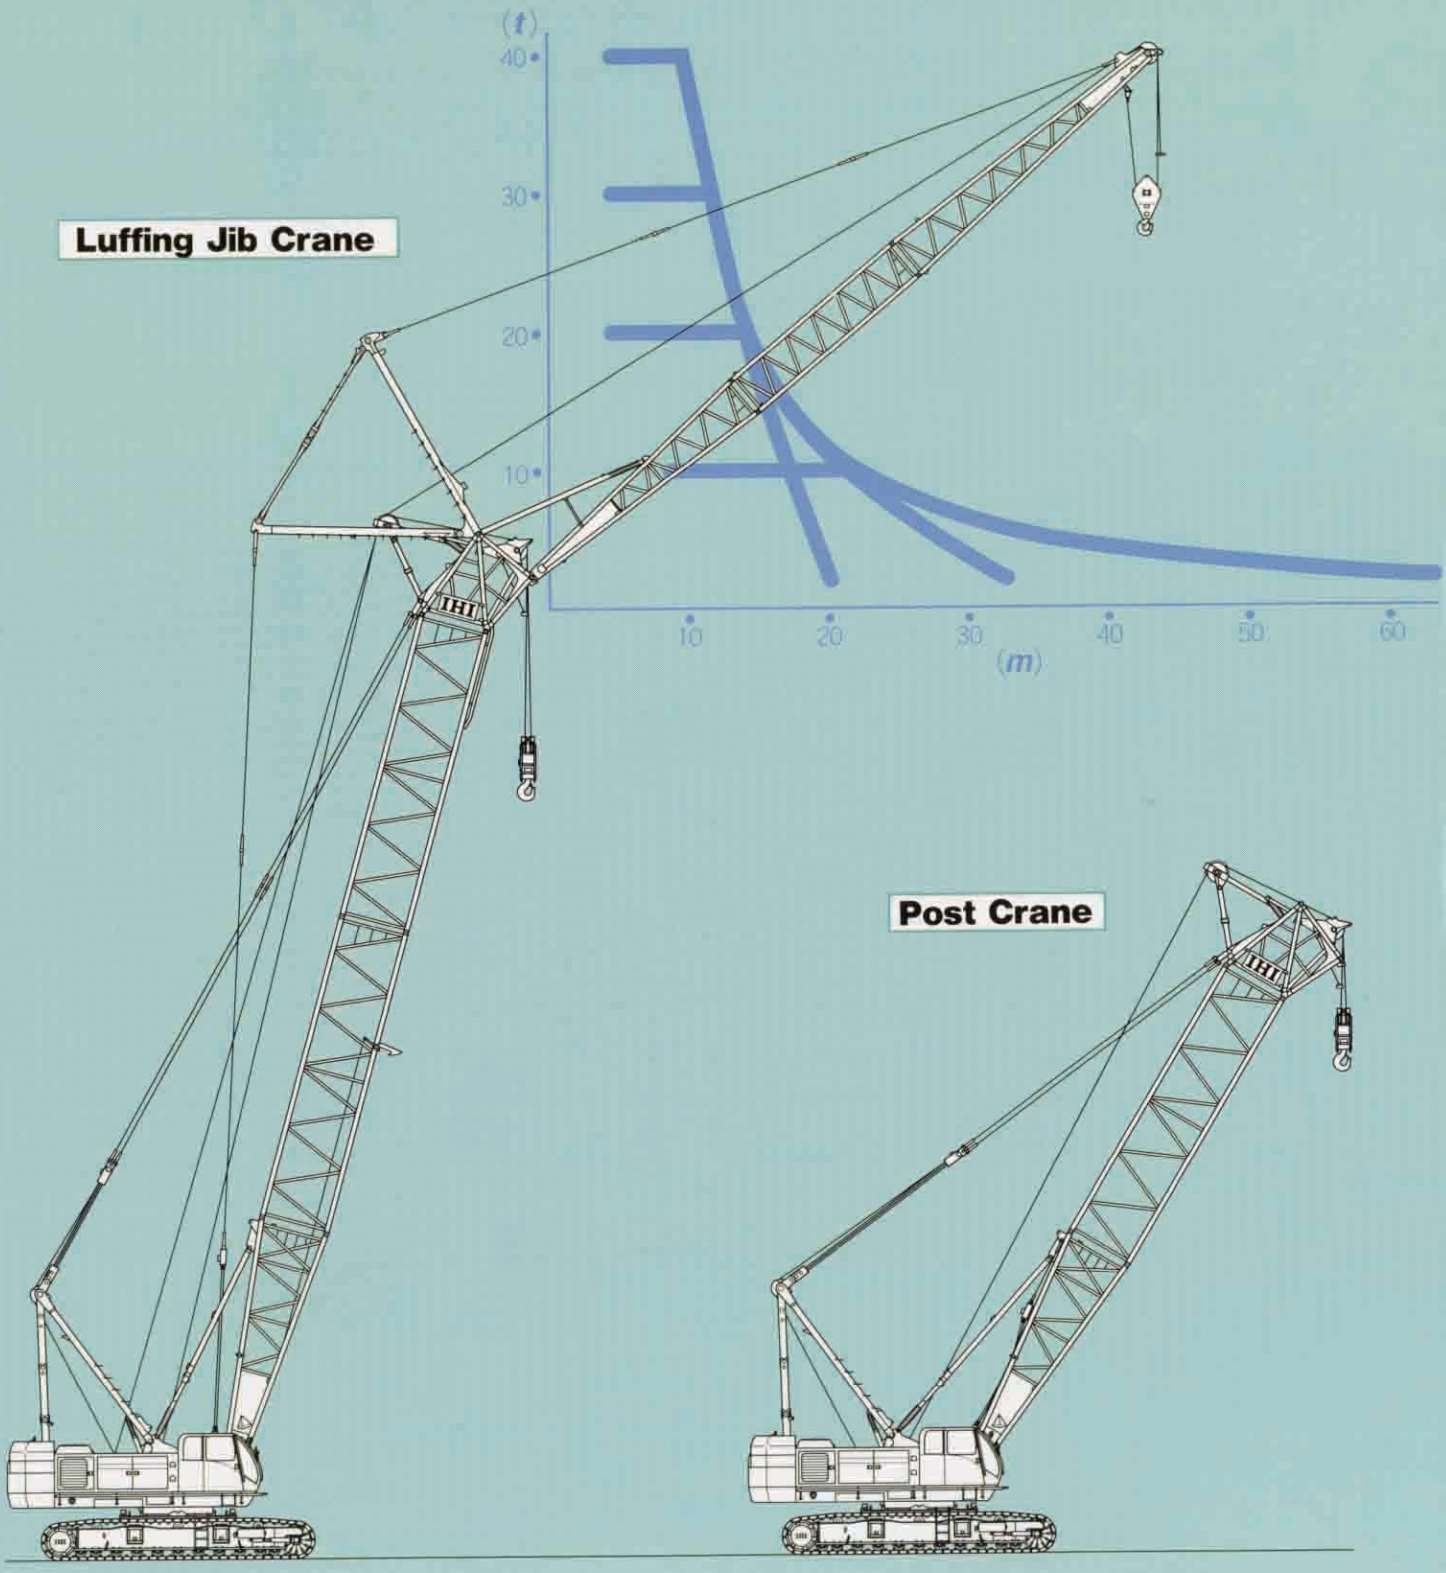

**Post Crane**

**Note:**  
Main and Jib hook blocks may not be operated simultaneously.

# Luffing Jib Crane



**CCH1200**

## Post rated lifting loads

(Unit : metric ton)

Post length(m)	27.25															33.25								
	23.0			26.0			23.0			26.0			29.0			32.0								
	10~20'	20~40'	40~	10~20'	20~40'	40~	10~20'	20~40'	40~	10~20'	20~40'	40~	10~20'	20~40'	40~	10~20'	20~40'	40~						
Working radius(m)	10~20'	20~40'	40~	10~20'	20~40'	40~	10~20'	20~40'	40~	10~20'	20~40'	40~	10~20'	20~40'	40~	10~20'	20~40'	40~						
5.0	5.2mX 40.0	5.2mX 40.0	5.2mX 40.0	5.2mX 40.0	5.2mX 40.0	5.2mX 40.0	5.8mX 40.0	5.8mX 40.0	5.8mX 40.0	5.8mX 40.0	5.8mX 40.0	5.8mX 40.0	5.8mX 40.0	5.8mX 40.0	5.8mX 40.0	5.8mX 40.0	5.8mX 40.0	5.8mX 40.0						
6.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0						
7.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0						
8.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0						
9.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0						
10.0	10.8mX 40.0	10.7mX 40.0	10.7mX 40.0	10.7mX 40.0	10.8mX 40.0	10.8mX 40.0	10.8mX 40.0	10.7mX 40.0	10.7mX 40.0	10.7mX 40.0	10.6mX 40.0	10.6mX 40.0	10.6mX 40.0	10.5mX 40.0	10.5mX 40.0	10.5mX 40.0	10.4mX 40.0	10.3mX 40.0						
12.0	33.0	32.6	32.5	32.4	32.1	31.9	32.8	32.4	32.3	32.2	31.9	31.7	31.6	31.3	31.0	31.0	30.6	29.9						
14.0	25.3	24.9	24.8	24.7	24.4	24.2	25.1	24.7	24.6	24.5	24.2	24.0	23.9	23.6	23.3	23.3	22.9	22.2						
16.0	19.9	19.5	19.4	19.3	19.0	18.8	19.7	19.3	19.2	19.1	18.8	18.6	18.5	18.2	17.9	17.9	17.5	16.8						
18.0	16.0	15.6	15.5	15.4	15.1	14.9	15.7	15.3	15.2	15.1	14.8	14.6	14.5	14.2	13.9	13.9	13.5	12.8						
20.0	12.9	12.5	12.4	12.3	12.0	11.8	12.7	12.3	12.2	12.1	11.8	11.6	11.5	11.2	10.9	10.9	10.5	9.8						
22.0	10.5	10.1	10.0	9.9	9.6	9.4	10.3	9.9	9.8	9.7	9.4	9.2	9.1	8.8	8.5	8.5	8.1	7.4						
24.0	8.5	8.1	8.0	7.9	7.6	7.4	8.3	7.9	7.8	7.7	7.4	7.2	7.1	6.8	6.5	6.5	6.1	5.4						
26.0	6.9	6.5	6.4	6.3	6.0	5.8	6.7	6.3	6.2	6.1	5.8	5.6	5.5	5.2	4.9	4.9	4.5	3.8						
28.0	26.3mX 6.7	26.3mX 6.7	26.3mX 6.2	26.3mX 6.1	26.3mX 5.8	26.3mX 5.6	5.3	4.9	4.8	4.7	4.4	4.2	4.1	3.8	3.5	3.5	3.1	2.4						
30.0							4.1	3.7	3.6	3.5	3.2	3.0	2.9	2.6	2.3	2.3								
32.0							31.5mX 3.4	31.5mX 3.0	31.5mX 2.9	31.5mX 2.8	31.5mX 2.5	31.5mX 2.3	31.5mX 2.2											

Post length(m)	39.25																	
	23.0			26.0			29.0			32.0			35.0			38.0		
	10~20'	20~40'	40~	10~20'	20~40'	40~	10~20'	20~40'	40~	10~20'	20~40'	40~	10~20'	20~40'	40~	10~20'	20~40'	40~
Working radius(m)	10~20'	20~40'	40~	10~20'	20~40'	40~	10~20'	20~40'	40~	10~20'	20~40'	40~	10~20'	20~40'	40~	10~20'	20~40'	40~
5.0																		
6.0	6.3mX 40.0	6.3mX 40.0	6.3mX 40.0	6.3mX 40.0	6.3mX 40.0	6.3mX 40.0	6.3mX 40.0	6.3mX 40.0	6.3mX 40.0	6.3mX 40.0	6.3mX 40.0	6.3mX 40.0	6.3mX 40.0	6.3mX 40.0	6.3mX 40.0	6.3mX 40.0	6.3mX 40.0	6.3mX 40.0
7.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0
8.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0
9.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0	40.0
10.0	10.7mX 40.0	10.7mX 40.0	10.7mX 40.0	10.6mX 40.0	10.6mX 40.0	10.6mX 40.0	10.5mX 40.0	10.5mX 40.0	10.5mX 40.0	10.5mX 40.0	10.4mX 40.0	10.3mX 40.0	10.4mX 40.0	10.3mX 40.0	10.1mX 40.0	10.3mX 40.0	10.2mX 40.0	9.9mX 40.0
12.0	32.6	32.2	32.1	32.0	31.7	31.5	31.4	31.1	30.8	30.8	30.4	29.7	30.2	29.5	28.4	29.6	28.8	27.1
14.0	24.9	24.5	24.4	24.3	24.0	23.8	23.7	23.4	23.1	23.1	22.7	22.0	22.5	21.8	20.7	21.9	21.1	19.4
16.0	19.5	19.1	19.0	18.9	18.6	18.4	18.3	18.0	17.7	17.7	17.3	16.6	17.1	16.4	15.3	16.5	15.7	14.0
18.0	15.5	15.1	15.0	14.9	14.6	14.4	14.3	14.0	13.7	13.7	13.3	12.6	13.1	12.4	11.3	12.5	11.7	10.0
20.0	12.5	12.1	12.0	11.9	11.6	11.4	11.3	11.0	10.7	10.7	10.3	9.6	10.1	9.4	8.3	9.5	8.7	7.0
22.0	10.0	9.6	9.5	9.4	9.1	8.9	8.8	8.5	8.2	8.2	7.8	7.1	7.6	6.9	5.8	7.0	6.2	4.5
24.0	8.1	7.7	7.6	7.5	7.2	7.0	6.9	6.6	6.3	6.3	5.9	5.2	5.7	5.0	3.9	5.1	4.3	2.6
26.0	6.4	6.0	5.9	5.8	5.5	5.3	5.2	4.9	4.6	4.6	4.2	3.5	4.0	3.3	2.2	3.4	2.6	
28.0	5.1	4.7	4.6	4.5	4.2	4.0	3.9	3.6	3.3	3.3	2.9	2.2	2.7	2.0		2.1		
30.0	3.9	3.5	3.4	3.3	3.0	2.8	2.7	2.4	2.1	2.1								
32.0	2.9	2.5	2.4	2.3	2.0													
34.0	2.0																	

Post length(m)	51.25																							
	23.0			26.0			29.0			32.0			35.0			38.0			41.0			44.0		
	10~20'	20~40'	40~	10~20'	20~40'	40~	10~20'	20~40'	40~	10~20'	20~40'	40~	10~20'	20~40'	40~	10~20'	20~40'	40~	10~20'	20~40'	40~	10~20'	20~40'	40~
Working radius(m)	10~20'	20~40'	40~	10~20'	20~40'	40~	10~20'	20~40'	40~	10~20'	20~40'	40~	10~20'	20~40'	40~	10~20'	20~40'	40~	10~20'	20~40'	40~	10~20'	20~40'	40~
5.0																								
6.0																								
7.0	7.4mX 30.0	7.4mX 30.0	7.4mX 30.0	7.4mX 30.0	7.4mX 30.0	7.4mX 30.0	7.4mX 30.0	7.4mX 30.0	7.4mX 30.0	7.4mX 30.0	7.4mX 30.0	7.4mX 30.0	7.4mX 30.0	7.4mX 30.0	7.4mX 30.0	7.4mX 30.0	7.4mX 30.0	7.4mX 30.0	7.4mX 30.0	7.4mX 30.0	7.4mX 30.0	7.4mX 30.0	7.4mX 30.0	7.4mX 30.0
8.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0
9.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0
10.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0
12.0	13.6mX 30.0	13.4mX 30.0	13.4mX 30.0	13.4mX 30.0	13.3mX 30.0	13.3mX 30.0	13.2mX 30.0	13.2mX 30.0	13.1mX 30.0	13.0mX 30.0	12.9mX 30.0	12.8mX 30.0	12.8mX 30.0	12.7mX 30.0	12.6mX 30.0	12.5mX 30.0	12.5mX 30.0	12.4mX 30.0	12.3mX 30.0	12.2mX 30.0	12.1mX 30.0	12.0mX 30.0	11.9mX 30.0	11.8mX 30.0
14.0	24.5	24.1	24.0	23.9	23.6	23.4	23.3	23.0	22.7	22.3	22.1	21.6	22.1	21.4	20.3	21.5	20.7	19.0	20.8	19.6	17.7	20.1	18.3	15.7
16.0	19.0	18.6	18.5	18.4	18.1	17.9	17.8	17.5	17.2	17.2	16.8	16.1	16.6	15.9	14.8	16.0	15.2	13.5	15.3	14.1	12.2	14.6	12.8	10.2
18.0	15.1	14.7	14.6	14.5	14.2	14.0	13.9	13.6	13.3	13.3	12.9	12.2	12.7	12.0	10.9	12.1	11.3	9.6	11.4	10.2	8.3	10.7	8.9	6.3
20.0	12.0	11.6	11.5	11.4	11.1	10.9	10.8	10.5	10.2	10.2	9.8	9.1	9.6	8.9	7.8	9.0	8.2	6.5	8.3	7.1	5.2	7.6	5.8	3.2
22.0	9.6	9.2	9.1	9.0	8.7	8.5	8.4	8.1	7.8	7.8	7.4	6.7	7.2	6.5	5.4	6.6	5.8	4.1	5.9	4.7	2.8	5.2	3.4	
24.0	7.6	7.2	7.1	7.0	6.7	6.5	6.4	6.1	5.8	5.8	5.4	4.7	5.2	4.5	3.4	4.6	3.8	2.1	3.9	2.7				

## Specifications

Max. lifting capacity × working radius	at Post	40metric tons × 10.8m	
	at Jib	20metric tons × 14.0m	
Max lift above ground level		92m (51.25m post + 44m jib)	
Rope speed	Main drum hoist/lowering	*100~50/50~25m/min	
	Aux drum hoist/lowering	*100~50/50~25m/min	
	Post hoist/lowering	*60~30m/min	
	Jib hoist/lowering	*60~30m/min	
Part line	at Post	Hook block capacity × Part line	40ton × 4
		Hook block capacity × Part line	20ton × 2
		Hook block capacity × Part line	20ton × 2
		Hook block capacity × Part line	11ton × 1
	at Jib	Post hoist	14
	Jib hoist	8	
Counterweight		50ton	
Total operating weight (with 51.25m post + 40ton hook + 44m jib + 20ton hook)		137.9ton	
Average ground bearing pressure		1.04kgf/cm <sup>2</sup>	

Note: The rope speed changes depending on the load.

## Combination of post and jib

Jib length (m)	Post length (m)																	
	18.25	21.25	24.25	27.25	30.25	33.25	36.25	39.25	42.25	45.25	48.25	51.25	54.25	57.25	60.25	63.25	66.25	
23				●	●	●	●	●	●	●	●	●	●	●				
26				●	●	●	●	●	●	●	●	●	●	●				
29				●	●	●	●	●	●	●	●	●	●	●				
32					●	●	●	●	●	●	●	●	●	●				
35						●	●	●	●	●	●	●	●	●				
38							●	●	●	●	●	●	●	●				
41								●	●	●	●	●	●	●				
44									●	●	●	●	●	●				

Note: ●: Possible combinations.

## Wire rope

Place of use	Rope diameter (mm)	Guaranteed strength (t)	Rope type
Main drum	φ26	61.0	PS(19) + 39 × P·7
Aux drum	φ26	61.0	PS(19) + 39 × P·7
Post hoist	φ22	36.3	IWRC6 × WS(31)
Jib hoist	φ26	57.8	IWRC6 × WS(31)
Post suspension	φ31.5	74.9	IWRC6 × Fi(29)
Jib suspension	φ34	86.7	IWRC6 × Fi(29)
Strut suspension	φ34	86.7	IWRC6 × Fi(29)

Note: wire rope length to be decided according to the ordered boom length.

## Post Composition



Post length (m)	Post composition (m)
18.25	7.5(inner) + 9.0 + 1.75(outer)
21.25	7.5 + 9.0 + 3.0 + 1.75
24.25	7.5 + 9.0 + 6.0 + 1.75
27.25	7.5 + 9.0 + 9.0 + 1.75
30.25	7.5 + 9.0 + 3.0 + 9.0 + 1.75
33.25	7.5 + 9.0 + 6.0 + 9.0 + 1.75
36.25	7.5 + 9.0 + 9.0 + 9.0 + 1.75
39.25	7.5 + 9.0 + 3.0 + 9.0 + 9.0 + 1.75
42.25	7.5 + 9.0 + 6.0 + 9.0 + 9.0 + 1.75
45.25	7.5 + 9.0 + 3.0 + 6.0 + 9.0 + 9.0 + 1.75
48.25	7.5 + 9.0 + 6.0 + 6.0 + 9.0 + 9.0 + 1.75
51.25	7.5 + 9.0 + 3.0 + 6.0 + 6.0 + 9.0 + 9.0 + 1.75
54.25	7.5 + 9.0 + 3.0 + 6.0 + 9.0 + 9.0 + 9.0 + 1.75
57.25	7.5 + 9.0 + 3.0 + 3.0 + 6.0 + 9.0 + 9.0 + 9.0 + 1.75
60.25	7.5 + 9.0 + 3.0 + 6.0 + 6.0 + 9.0 + 9.0 + 9.0 + 1.75
63.25	7.5 + 9.0 + 3.0 + 6.0 + 9.0 + 9.0 + 9.0 + 9.0 + 1.75
66.25	7.5 + 9.0 + 3.0 + 3.0 + 6.0 + 9.0 + 9.0 + 9.0 + 1.75

Notes  
 1. 9.0m insert post (9.0) is installed to the middle equalizer guide rail and load hoist guide sheave.  
 2. 3.0m ~ 9.0m insert post including jib strut suspension pendant rope.  
 3. Required middle suspension for post length 54.25 m and long.

## Jib Composition

Jib length (m)	Jib composition (m)
23	8.0(inner) + 6.0 + 9.0(outer)
26	8.0 + 3 + 6 + 9.0
29	8.0 + 3 + 9 + 9.0
32	8.0 + 6 + 9 + 9.0
35	8.0 + 9 + 9 + 9.0
38	8.0 + 3 + 9 + 9 + 9.0
41	8.0 + 6 + 9 + 9 + 9.0
44	8.0 + 3 + 6 + 9 + 9 + 9.0

## Working range (No load condition)

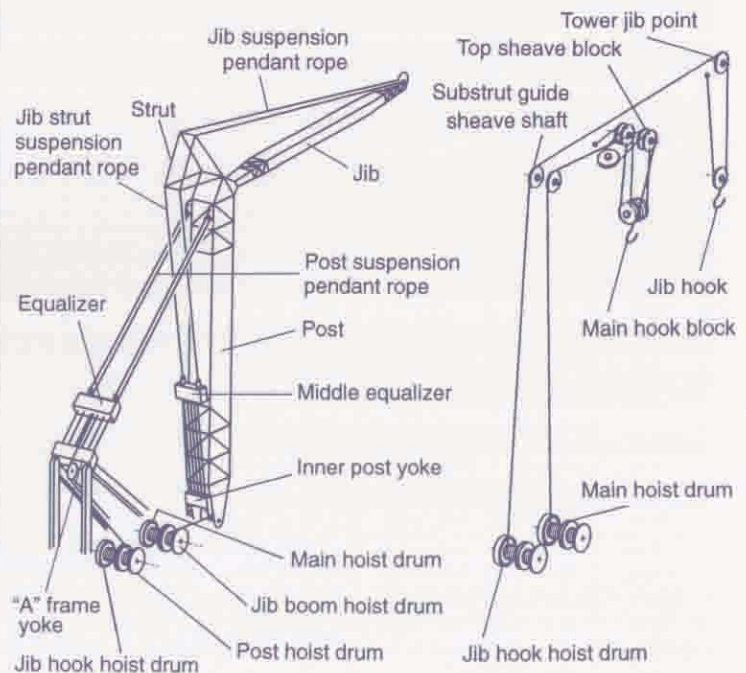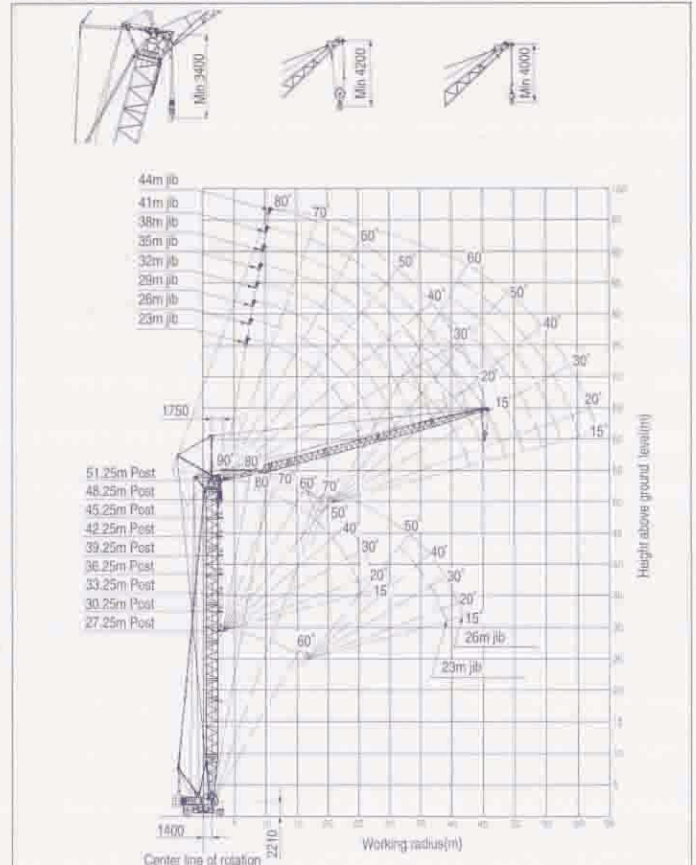

## Auxiliary jib rated lifting loads

(Unit : metric ton)

Boom length(m) Working radius(m)	18.0	21.0	24.0	27.0	30.0	33.0	36.0	39.0	42.0	45.0	48.0	51.0	54.0	57.0	60.0	63.0	66.0	69.0	72.0		
5.5	5.7m×11.0																				
6.0	11.0	6.2m×11.0	6.7m×11.0																		
7.0	11.0	11.0	11.0	7.2m×11.0	7.8m×11.0																
8.0	11.0	11.0	11.0	11.0	11.0	8.3m×11.0	8.8m×11.0														
9.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	9.3m×11.0	9.8m×11.0												
10.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	10.4m×11.0	10.9m×11.0	11.4m×11.0	11.9m×11.0								
12.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	12.5m×11.0	13.0m×11.0	13.5m×11.0					
14.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	14.5m×11.0			
16.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	15.1m×11.0		
18.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	
20.0	18.6m×11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	
22.0		21.1m×11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	
24.0			23.7m×11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	23.8m×11.0	
26.0				11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	27.7m×11.0	27.8m×11.0	27.4m×11.0	27.1m×11.0	26.9m×11.0	26.4m×11.0	9.8	
28.0				26.3m×11.0	11.0	29.2m×11.0	29.0m×11.0	28.7m×11.0	28.5m×11.0	28.4m×11.0	28.2m×11.0	11.0	10.9	10.8	10.7	10.5	10.3	10.2	8.9		
30.0					28.9m×11.0	10.6	10.5	10.3	10.2	10.1	10.0	9.9	9.7	9.6	9.5	9.3	9.1	9.0	8.0		
32.0						31.5m×9.8	9.5	9.3	9.2	9.1	9.0	8.9	8.7	8.6	8.5	8.3	8.1	7.9	7.1		
34.0							8.6	8.4	8.3	8.2	8.1	8.0	7.8	7.7	7.6	7.4	7.2	6.9	6.4		
36.0								7.6	7.5	7.4	7.3	7.2	7.0	6.9	6.8	6.6	6.4	6.0	5.7		
38.0									36.6m×7.4	6.8	6.7	6.6	6.5	6.3	6.2	6.1	5.9	5.7	5.2	5.0	
40.0										36.2m×6.4	6.1	6.0	5.9	5.7	5.6	5.5	5.3	5.1	4.5	4.3	
42.0											41.8m×5.6	5.5	5.4	5.2	5.1	5.0	4.8	4.6	3.9	3.7	
44.0												5.0	4.9	4.7	4.6	4.5	4.3	4.1	3.5	3.2	
46.0												44.4m×4.9	4.4	4.2	4.1	4.0	3.8	3.6	3.0	2.7	
48.0													47.0m×4.2	3.8	3.7	3.6	3.4	3.1	2.5	2.2	
50.0														49.6m×3.5	3.3	3.2	3.0	2.7	2.1	1.7	
52.0															3.0	2.9	2.7	2.2	1.7	1.3	
54.0																52.2m×2.9	2.6	2.4	1.8	1.3	

### Notes

- Above rated loads are based on firm level ground, within 78% of tipping load at any point 360° throughout and with front stability of 1.15 or more.
- Working radius is horizontal distance from center of rotation to a vertical line through the center of gravity of the load.

3. When the main hook block is installed, the lifting loads of jib must be reduced by the weight of hook block (main and jib) and other lifting devices.

- 120ton hook block→1.60ton
- 60ton hook block→1.15ton
- 50ton hook block→0.95ton
- 30ton hook block→0.75ton
- 11ton hook block→0.40ton

## Jib rated lifting loads

Boom length(m) Jib length(m) Offset angle Working radius(m)	30.0						42.0						63.0								
	13.0		19.0		25.0		13.0		19.0		25.0		13.0		19.0		25.0				
	10'	30'	10'	30'	10'	30'	10'	30'	10'	30'	10'	30'	10'	30'	10'	30'	10'	30'			
9.0																					
10.0	11.3m×11.0																				
12.0	11.0		13.4m×10.0				13.4m×11.0														
14.0	11.0	15.0m×8.5	10.0		14.9m×5.5		11.0		15.5m×10.0												
16.0	11.0	8.5	10.0		5.5		11.0	17.1m×8.5	10.0			17.0m×5.5		17.0m×11.0							
18.0	11.0	8.5	10.0	18.9m×6.5	5.5		11.0	8.5	10.0			5.5		11.0	20.8m×8.5	10.0		19.1m×10.0		20.7m×5.5	
20.0	11.0	8.5	10.0	6.5	5.5		11.0	8.5	10.0			21.0m×6.5	5.5	11.0	8.5	10.0				20.7m×5.5	
22.0	11.0	8.5	10.0	6.5	5.5	22.3m×4.5	11.0	8.5	10.0	6.5	5.5			11.0	8.5	10.0				5.5	
24.0	11.0	8.5	10.0	6.5	5.5	4.5	11.0	8.5	10.0	6.5	5.5	24.3m×4.5	11.0	8.5	10.0	24.6m×6.5				5.5	
26.0	11.0	8.5	10.0	6.5	5.5	4.5	11.0	8.5	10.0	6.5	5.5	4.5	11.0	8.5	10.0	6.5	5.5				
28.0	11.0	8.5	10.0	6.5	5.5	4.5	29.8m×11.0	8.5	10.0	6.5	5.5	4.5	28.3m×11.0	8.5	10.0	6.5	5.5	5.5	4.5		
30.0	30.7m×11.0	8.5	10.0	6.5	5.5	4.5	10.9	8.5	10.0	6.5	5.5	4.5	10.0	8.5	10.0	6.5	5.5	5.5	4.5		
32.0	10.4	8.5	10.0	32.8m×10.0	6.5	5.5	4.5	9.9	8.5	9.9	6.5	5.5	4.5	9.0	33.1m×8.5	9.0	6.5	5.5	4.5		
34.0	9.5	8.5	9.5	6.5	5.5	4.5	9.0	35.3m×8.5	9.0	6.5	5.5	4.5	8.1	8.1	8.1	6.5	5.5	4.5			
36.0	8.7	36.6m×8.5	8.7	6.5	5.5	4.5	8.2	8.2	8.2	6.5	5.5	4.5	7.3	7.3	7.3	6.5	5.5	4.5			
38.0	8.0	8.0	8.0	6.5	5.5	4.5	7.5	7.5	7.5	6.5	5.5	4.5	6.6	6.6	6.6	6.6	38.6m×6.5	5.5	4.5		
40.0	7.4	7.4	7.4	6.5	5.5	4.5	6.9	6.9	6.9	6.9	41.5m×6.5	5.5	4.5	6.0	6.0	6.0	6.0	5.5	4.5		
42.0	40.1m×7.4	41.1m×7.1	6.9	43.8m×6.5	5.5	4.5	6.4	6.4	6.4	6.4	6.4	5.5	4.5	5.5	5.5	5.5	5.5	5.5	4.5		
44.0			6.4	6.4	5.5	4.5	5.9	5.9	5.9	5.9	45.6m×5.5	4.5	4.5	5.0	5.0	5.0	5.0	5.0	4.5		
46.0			45.8m×6.0	5.9	5.5	4.5	5.4	5.4	5.4	5.4	5.4	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	48.1m×4.5	
48.0				47.1m×6.7	5.5	4.5	5.0	5.0	5.0	5.0	5.0	4.5	4.5	4.1	4.1	4.1	4.1	4.1	4.1	4.1	
50.0					5.1	4.5	4.6	4.6	4.6	4.6	4.6	4.6	50.7m×4.5	3.7	3.7	3.7	3.7	3.7	3.7	3.7	
52.0						51.2m×4.9	4.5	50.5m×4.5	51.5m×4.4	4.3	4.3	4.3	4.3	3.4	3.4	3.4	3.4	3.4	3.4	3.4	
54.0							53.1m×4.5			4.0	4.0	4.0	4.0	3.1	3.1	3.1	3.1	3.1	3.1	3.1	
56.0										3.6	3.6	3.6	3.6	2.7	2.7	2.7	2.7	2.7	2.7	2.7	
58.0											56.2m×3.5	3.3	3.3	2.4	2.4	2.4	2.4	2.4	2.4	2.4	
60.0														3.0	3.0	2.1	2.1	2.1	2.1	2.1	

### Notes

- Above rated loads are based on firm level ground, within 78% of tipping load at any point 360° throughout and with front stability of 1.15 or more.
- Working radius is horizontal distance from center of rotation to a vertical line through the center of gravity of the load.

3. When the main hook block is installed, the lifting loads of jib must be reduced by the weight of hook block (main and jib) and other lifting devices.

- 120ton hook block→1.60ton
- 60ton hook block→1.15ton
- 50ton hook block→0.95ton
- 30ton hook block→0.75ton
- 11ton hook block→0.40ton

## Main boom rated lifting loads

(Unit : metric ton)

Boom length(m) Working radius(m)	18.0	21.0	24.0	27.0	30.0	33.0	36.0	39.0	42.0	45.0	48.0	51.0	54.0	57.0	60.0	63.0	66.0	69.0	72.0	75.0	
5.0	120.0																				
5.5	106.7	90.0																			
6.0	97.0	90.0	80.0	70.0																	
7.0	83.3	81.2	75.0	7.2m×70.0	7.1m×60.0	7.6m×50.0															
8.0	71.7	71.5	67.5	64.0	60.0	50.0	8.1m×50.0	8.6m×40.0													
9.0	60.6	60.0	59.7	57.5	54.1	50.0	50.0	40.0	9.2m×40.0	9.7m×40.0											
10.0	51.8	51.6	51.5	51.0	48.8	47.4	46.0	40.0	11.3m×40.0	11.2m×40.0	11.0m×40.0	10.2m×30.0	10.7m×30.0	11.2m×28.3	11.8m×28.1						
12.0	40.6	40.4	40.3	40.2	40.0	39.2	38.4	37.8	37.5	37.1	30.0	30.0	28.3	28.1	12.3m×30.0	12.8m×30.0	13.3m×18.0	13.8m×16.0			
14.0	32.9	32.7	32.6	32.5	32.3	32.2	32.1	31.9	31.8	31.7	14.1m×30.0	30.0	28.3	28.1	20.0	20.0	19.0	16.0	14.4m×14.5	14.9m×13.0	
16.0	27.6	27.4	27.3	27.2	27.0	26.9	26.8	26.6	26.5	26.4	26.3	26.2	25.1	24.9	20.0	17.4m×20.0	19.0	16.0	14.5	13.0	
18.0	17.2m×26.1	23.4	23.3	23.2	23.0	22.9	22.8	22.6	22.5	22.4	22.3	22.2	22.0	21.9	20.0	19.2	17.9	16.0	14.5	13.0	
20.0		19.7m×20.8	20.2	20.1	19.9	19.8	19.7	19.5	19.4	19.3	19.2	19.1	18.9	18.8	18.2	17.5	16.7	15.2	13.6	11.6	
22.0			17.8	17.7	17.5	17.4	17.3	17.1	17.0	16.9	16.8	16.7	16.5	16.4	15.8	15.3	14.2	12.6	10.4		
24.0			22.3m×17.5	15.8	15.6	15.5	15.4	15.2	15.1	15.0	14.9	14.8	14.6	14.5	14.4	14.2	13.8	13.0	11.6	9.4	
26.0				24.9m×15.0	13.9	13.8	13.7	13.5	13.4	13.3	13.2	13.1	12.9	12.8	12.7	12.5	12.3	11.9	10.5	8.4	
28.0					27.5m×12.9	12.5	12.4	12.2	12.1	12.0	11.9	11.8	11.6	11.5	11.4	11.2	11.0	10.9	9.8	7.6	
30.0						11.3	11.2	11.0	10.9	10.8	10.7	10.6	10.4	10.3	10.2	10.0	9.8	9.7	8.7	6.9	
32.0							10.2	10.0	9.9	9.8	9.7	9.6	9.4	9.3	9.2	9.0	8.8	8.6	7.8	6.2	
34.0								32.7m×9.9	9.1	9.0	8.9	8.8	8.7	8.5	8.4	8.3	8.1	7.9	7.6	5.5	
36.0									35.3m×8.6	8.2	8.1	8.0	7.9	7.7	7.6	7.5	7.3	7.1	6.7	5.0	
38.0										37.9m×7.5	7.4	7.3	7.2	7.0	6.9	6.8	6.6	6.4	5.9	4.4	
40.0											6.8	6.7	6.6	6.4	6.3	6.2	6.0	5.8	5.2	3.9	
42.0												40.5m×6.7	6.2	6.1	5.9	5.8	5.7	5.5	5.3	4.6	3.5
44.0													43.1m×5.9	5.6	5.4	5.3	5.2	5.0	4.8	4.2	3.0
46.0														45.7m×6.2	4.9	4.8	4.7	4.5	4.3	3.7	2.6
48.0															48.3m×4.5	4.5	4.4	4.3	4.1	3.8	2.2
50.0																48.3m×4.5	4.0	3.9	3.7	2.8	2.4
52.0																	50.9m×3.9	3.6	3.4	2.9	2.0
54.0																		53.5m×3.4	3.1	2.5	2.0



### Notes

- Above rated loads are based on firm level ground, within 78% of tipping load at any point 360° throughout and with front stability of 1.15 or more.
- Working radius is horizontal distance from center of rotation to a vertical line through the center of gravity of the load.
- The weight of the slings, hook block(s) and auxiliary lifting devices must be considered to be part of the load.  
Hook block  
120ton capacity--1.60ton 60ton capacity--1.15ton  
50ton capacity--0.95ton 30ton capacity--0.75ton  
1ton capacity--0.40ton

4. Jib boom can be fitted to main boom in the following combinations.

Jib length(m)	Auxiliary	13.0	19.0	25.0
Boom length(m)	18.0~72.0	30.0~63.0	30.0~63.0	30.0~63.0

5. When jib boom is fitted actual loads that can be lifted with main hook block should be reduced according to the above chart (the weights include that of the auxiliary hook block).

Jib length(m)	Auxiliary	13.0	19.0	25.0
Weight to be deducted(ton)	0.70	2.80	3.30	3.90

6. High "A" Frame should be extended before working.

7. The rated loads for the Auxiliary jib must be reduced 0.7 ton from same radius of rated lifting loads of the main boom which installed the jib.  
The rated loads for the 13m jib--25m jib are same as main boom's one which installed jib. (Ref. Jib rated lifting loads)  
However do not exceed below limit.



Jib length(m)	Auxiliary		13.0		19.0		25.0	
	Jib offset angle		Jib offset angle		Jib offset angle		Jib offset angle	
Limited loads(ton)	11.0		11.0		10.0		6.5	
	10°	30°	10°	30°	10°	30°	10°	30°

8. The rated load for Jib when the main hook is installed must be reduced by the total weight of the main hook and jib hook.

9. Depending on the number of part lines, rated lifting load is limited as follows:

- 1 Part line-----up to 12 ton
- 2 Part line-----up to 24 ton
- 3 Part line-----up to 36 ton
- 4 Part line-----up to 48 ton
- 5 Part line-----up to 60 ton
- 6 Part line-----up to 72 ton
- 7 Part line-----up to 84 ton
- 8 Part line-----up to 96 ton
- 9 Part line-----up to 108 ton
- 10 Part line-----up to 120 ton

10. Rated loads shown in bold lines are based on structural strength factors.

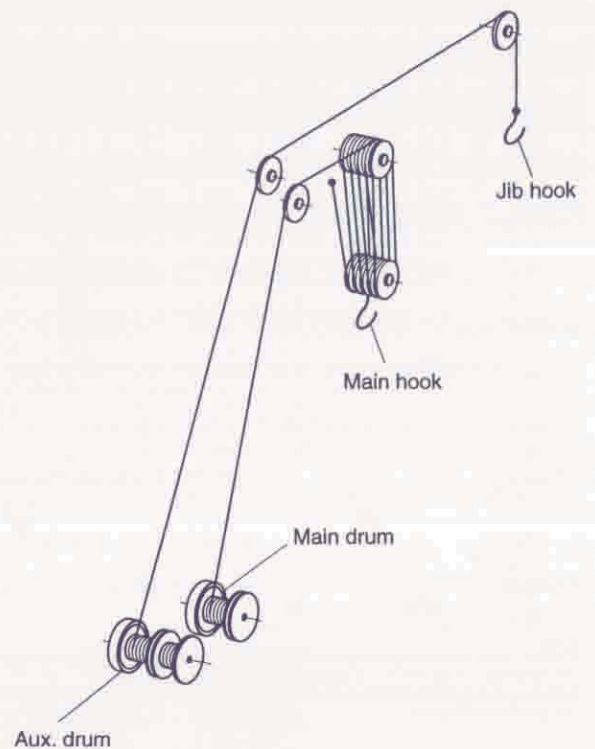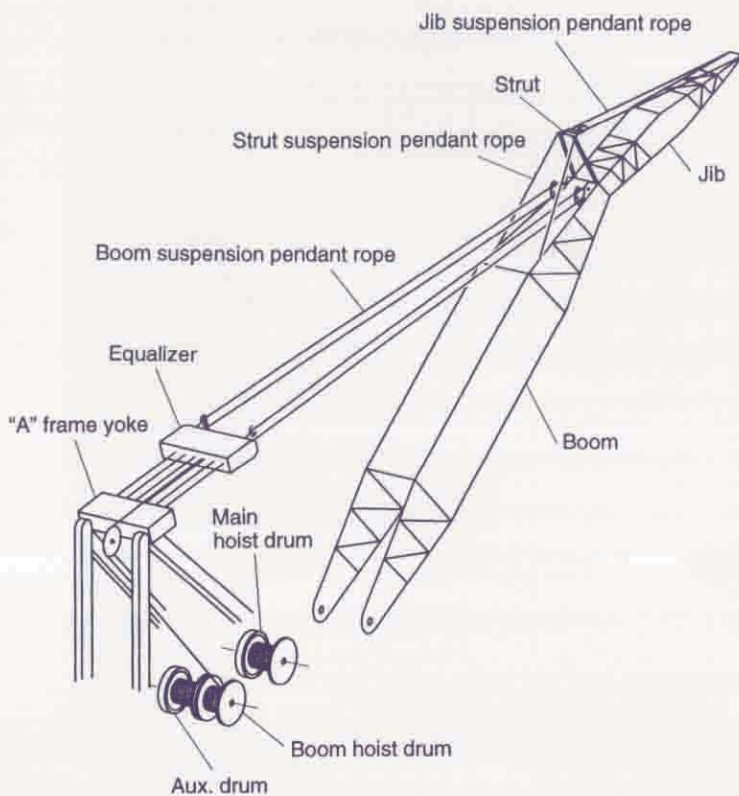

## Specifications

Max. Lifting capacity × working radius		120 metric tons × 5.0m
Max. boom length		75m
Max. boom length, (main + jib)		88m (63m boom + 25m jib)
Rope speed	Main drum hoist / lowering	* 100~50/50~25 m/min
	Aux. drum hoist / lowering	* 100~50/50~25 m/min
	Boom drum hoist / lowering	* 60~30 m/min
Part line	Hook block capacity × Part line	120ton × 10
	Hook block capacity × Part line	11ton × 1
	Boom drum hoist/lowering part line	14
Counterweight		50ton
Total operating weight (with 18m boom)		121.5ton (Approx.)
Average ground bearing pressure		0.92kgf/cm <sup>2</sup>

\* The rope speed changes depending on the load.

## Combination of Boom and Jib (●: Available combination)


Jib length (m)	Boom length (m)																	
	18-24	27	30	33	36	39	42	45	48	51	54	57	60	63	66	69	72	75
Auxiliary	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
13			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
19			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
25			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

## Wire Rope

Place of use	Rope diameter (mm)	Guaranteed strength (ton)	rope type
Load hoist	φ 26	61.0	A
Boom hoist	φ 22	36.3	B
Boom suspension	φ 31.5	74.9	C
Jib load hoist	φ 26	61.0	A
Jib Boom suspension	φ 28	59.3	C
Jib strut suspension	φ 28	59.3	C


Rope type A: PS(19)+39×P-7  
 B: IWRC 6×WS(31)  
 C: IWRC 6×F(29)

## Boom & Jib Combination

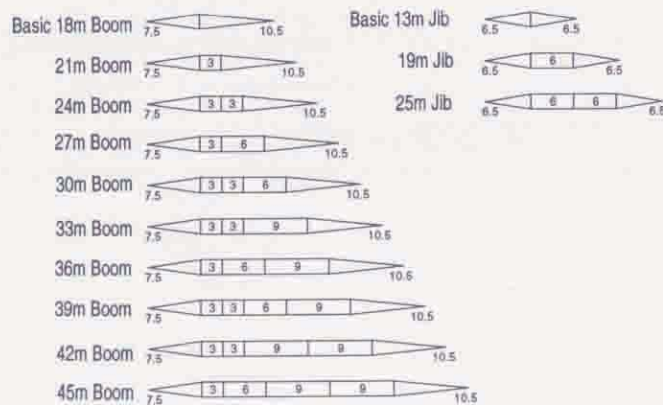


Note: 1. Compositions shown are for maximum length at time of delivery.  
 2. Required middle suspension for boom length 63m and longer.  
 3. Boom can be converted into a post for tower crane operation by replacing top section.

## Working range (No load condition)

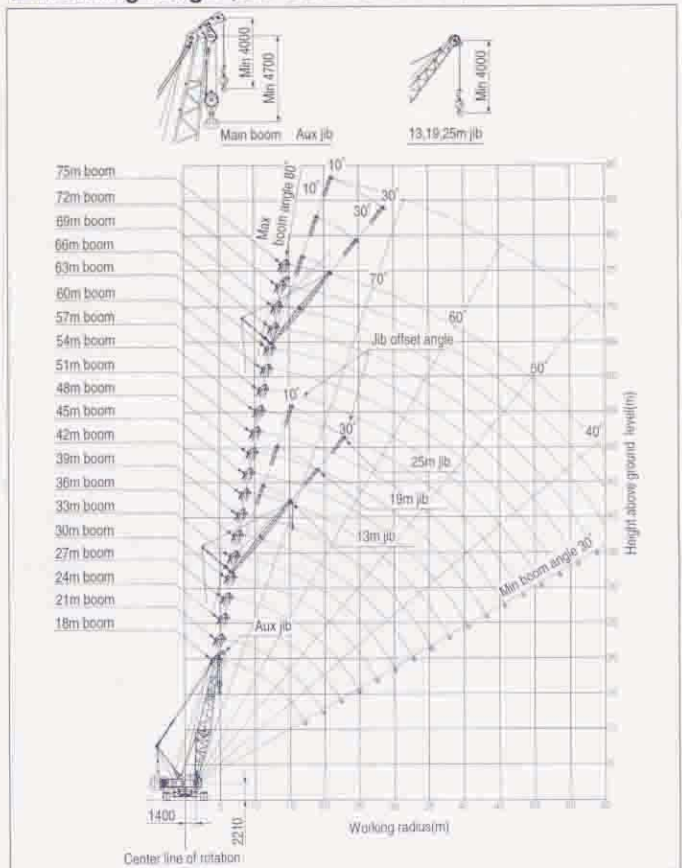

■ General Dimensions (with basic boom)  
Unit: mm

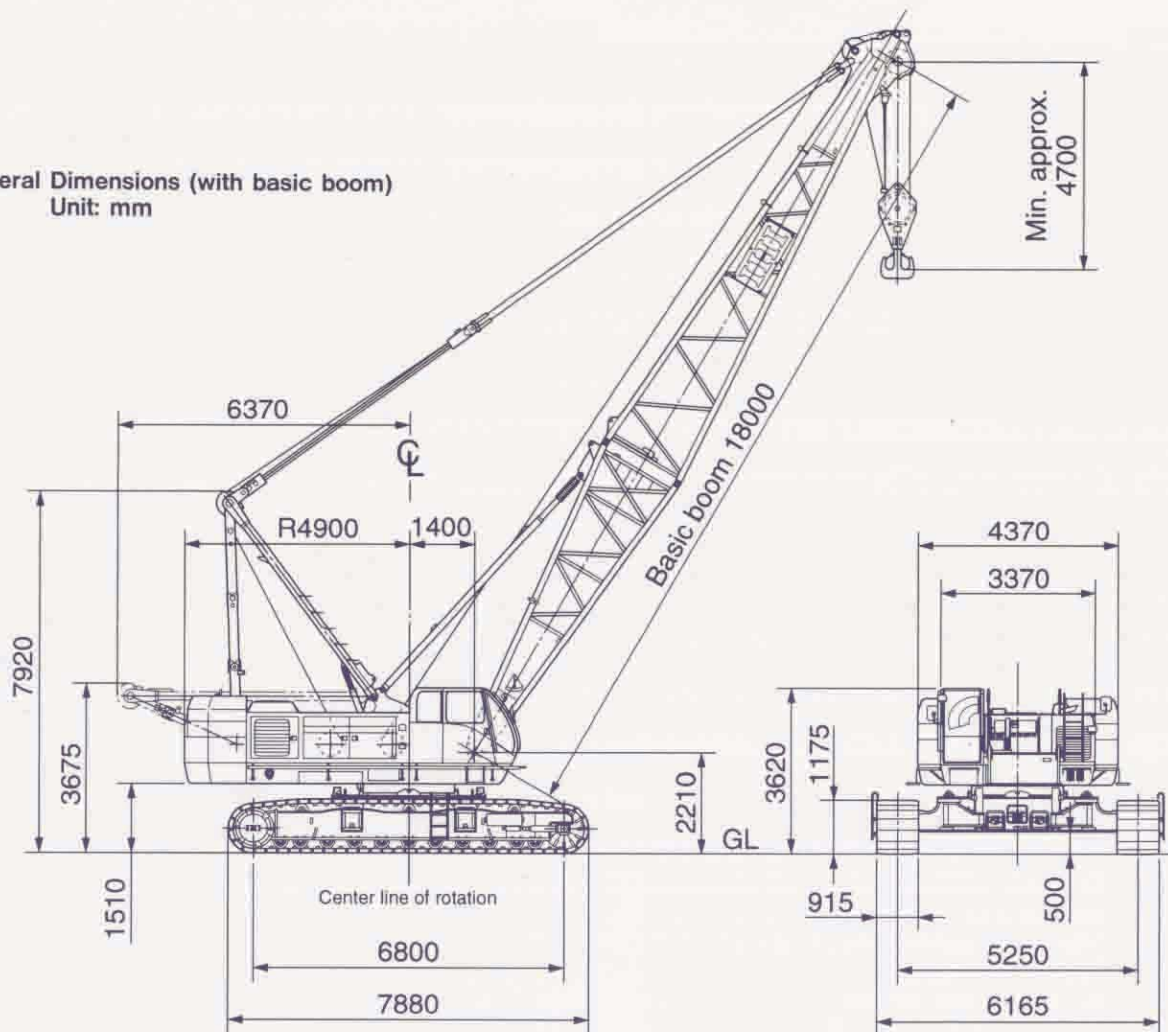

■ Specifications

Performance	
Swing speed	2.2 rpm
Travel speed	* 1.5/1.0 km/h (0.93/0.62 mph)
Gradeability	30% (Approx. 16.7° with 18m Boom and 120ton hook block)
Engine	
Make	HINO MOTOR
Model	K13TJ(with turbo) diesel engine 4-cycle, water cooled, overhead valve
Type	Direct injection diesel engine
Total piston displacement	12.882 ℓ
Rated output	320 PS/2000 rpm
Fuel tank capacity	450 ℓ
Battery	12 V×150 AH×2 pcs.
Load hoist system (Main & Aux.)	
Hydraulic motor	Variable displacement axial piston type
Reduction gear	Two-stage planetary gear and single stage spur gear
Hoist drum	Tandem drums driven independently by hydraulic motor, lagging type with lebus grooved drum.
Clutch	Internal expanding band type
Brake	External contracting type
Drum lock	Ratchet lock
Hydraulic pump	Variable displacement axial piston type×2 Gear pump×3
Boom hoist system	
Motor	Axial piston type
Reduction gear	One stage planetary gear + One stage spur gear
Hoist drum	Lebus grooved drum
Brake	Automatic spring - loaded hydraulically released wet type multi-disk
Drum lock	Ratchet lock

\* Travel speed changes depending on the load.

■ Standard Equipment

- Instrument for crane
    - Engine tachometer (Hour meter)
    - Hydraulic oil pressure gauge (for control circuit)
    - Fuel level gauge
    - Engine coolant thermo indicator
    - Engine oil pressure indicator
    - Hydraulic oil thermo indicator
  - Lighting for crane
    - 2-Work light (24v × 80w)
    - 1-Room light (24v × 10w)
  - Safety device
    - Automatic stop for hook overwinding
    - Automatic stop for boom overwinding
    - Telescopic boom limit stop
    - Swing lock
    - Main and auxiliary drum lock
    - Boom hoist drum lock
    - 2nd. boom stop device (82° non-resettable)
    - Clutch engage pin on main and auxiliary winch
    - Safety valve for hydraulic circuit
    - Counter balance valve
    - Control lever locking device
  - Other standard accessories
    - Front windshield wipers (intermittent, w/washer)
    - Roof wipers (intermittent, w/washer)
    - Survivor
    - Sun shade
    - Storage pouch
    - Tool box
    - Reclining operator's seat
    - Floor mat
- Jack device for dismantling
  - Lateral cylinders for dismantling crawler
  - Steps for operator's cab
  - Radio
  - Cigarette lighter
  - Ash tray
  - Large rear view mirrors (right/left)
  - Signal horn
  - Electric fuel filling pump
  - Swing warning flasher
  - Travel warning flasher
  - High "A" frame erecting device
  - Low-noise cab
  - Bronze tinted glass
  - Wire mesh boom workway (for inner boom)
  - Foot rest
  - Electric type engine throttle
  - Foot pedal-type engine throttle
  - Automatic engine deceleration
  - Ultra low speed control
  - Hydraulic assist brake for main and aux. winch
  - Winch mode selector for main and aux. winch
  - Rope guide roller on outer boom
  - Plug socket
  - Loud speaker
  - Emergency engine stop switch
  - OK monitor

# Luffing Jib Crane



CC11200

## Jib rated lifting loads

(Unit : metric ton)

Post length(m)	27.25									36.25														
	23.0			26.0			23.0			26.0			29.0			32.0			35.0					
	90°	75°	60°	90°	75°	60°	90°	75°	60°	90°	75°	60°	90°	75°	60°	90°	75°	60°	90°	75°	60°			
7.2	20.0			7.7mx 18.0			20.0			7.7mx 18.0			8.2mx 16.0			8.8mx 15.2			9.3mx 14.0					
10.0	20.0			18.0			20.0			18.0			16.0			15.2			14.0					
12.0	20.0			18.0			20.0			18.0			16.0			15.2			14.0					
14.0	20.0			18.0			20.0			18.0			16.0			15.2			14.0					
15.0	18.0			18.0			18.0			18.0			16.0			15.2			14.0					
16.0	16.6			16.5			16.6			16.5			16.0			15.2			13.5					
18.0	14.3			14.3			14.3			14.3			14.3			14.2			12.5					
20.0	12.7			12.7			12.7			12.7			12.7			12.7			11.4					
22.0	11.4			11.4			11.4	22.2mx 11.3		11.4	23.5mx 10.6		11.4			11.4			10.5					
24.0	10.3			10.3			10.3	10.3		10.3	10.3		10.3	24.8mx 9.9		10.3			9.8					
26.0	25.3mx 9.8			9.4	9.4		25.3mx 9.8	9.5		9.4	9.4		9.4	9.4		9.4	9.4		8.8	27.3mx 8.3				
28.0				8.8	8.8			9.0		8.8	8.8		8.9	8.9		8.5	8.5		8.1	8.1				
30.0				8.5	31.4mx 8.2	28.2mx 8.8	8.5			8.5	28.2mx 8.7		8.3			8.2	8.2		7.4	7.4				
32.0				8.1	8.1		8.2	33.3mx 8.0		8.1			7.9			31.1mx 7.8	7.6		7.0	7.0		6.9	6.9	
34.0				7.8	32.3mx 8.0	7.8	7.9	7.9		7.8	35.9mx 7.4		7.6			7.3			6.6	6.6		6.4	6.4	
36.0				7.3	35.2mx 7.8	7.4	7.4	34.6mx 7.7		7.3	37.8mx 6.9		7.3			7.0			6.2			6.0	6.0	
38.0				6.6			6.7			6.5	37.5mx 7.0		6.8			6.7	39.7mx 6.5		5.8			36.9mx 5.9	5.7	
40.0				6.3	38.7mx 6.3		6.3			5.7			6.0			6.4	6.4		5.5			41.7mx 5.3	5.4	
42.0							41.6mx 6.0			5.1			5.1			40.4mx 6.3	5.6		5.2	5.2		5.1	43.6mx 4.9	
44.0										43.2mx 4.8			4.4			4.7			4.3			4.9	4.8	4.8
46.0													4.2			4.3			4.2			4.6	4.6	
48.0													4.2			4.0			3.8			4.6	4.2	
50.0																4.0			3.6			4.2	3.7	
52.0																4.0			3.6			4.2	3.5	
54.0																4.0			3.6			4.2	3.3	
56.0																4.0			3.6			4.2	3.2	

Post length(m)	39.25																				
	23.0			26.0			29.0			32.0			35.0			38.0					
	90°	75°	60°	90°	75°	60°	90°	75°	60°	90°	75°	60°	90°	75°	60°	90°	75°	60°			
7.2	20.0			7.7mx 18.0			8.2mx 18.0			8.8mx 15.2			9.3mx 14.0			9.8mx 12.0					
10.0	20.0			18.0			16.0			15.2			14.0			12.0					
12.0	20.0			18.0			16.0			15.2			14.0			12.0					
14.0	20.0			18.0			16.0			15.2			14.0			12.0					
15.0	18.0			18.0			16.0			15.2			14.0			12.0					
16.0	16.6			16.5			16.0			15.2			13.5			12.0					
18.0	14.3			14.3			14.3			14.2			12.5			12.0					
20.0	12.7			12.7			12.7			12.7			11.4			11.1					
22.0	11.4			11.4			11.4			11.4			10.5			10.2					
24.0	10.3			10.3			10.3	25.6mx 9.6		10.3			9.6			9.4					
26.0	25.3mx 9.8			9.4	9.4		9.4	9.4		9.4	26.8mx 9.0		8.8			8.6					
28.0				8.7	8.7		8.9	8.9		8.5	8.5		8.1			7.9	29.4mx 7.4				
30.0				8.5	28.2mx 8.7		8.2	7.9	7.9	7.7	7.7		7.4	7.4		7.2	7.2				
32.0				8.1			7.7	31.1mx 7.8		7.3	7.0	7.0		6.9	6.9		6.7	6.7			
34.0				7.8			7.4			6.9	6.6	6.6		6.4	6.4		6.2	6.2			
36.0				7.3	35.4mx 7.5	37.4mx 6.7	7.1			6.6			6.2			6.0	6.0		5.8	5.8	
38.0				6.5			6.8	39.3mx 6.3		6.4			5.8			36.9mx 5.9	5.7		5.4	5.4	
40.0				5.6			6.0	41.2mx 5.8		6.1	41.2mx 5.8		5.5			5.4			38.8mx 5.1	5.1	
42.0				5.0			5.1			4.6	43.2mx 5.0		5.2			5.1			4.8	4.8	
44.0				4.3			4.3			4.6	4.9	4.9				4.8	45.1mx 4.7		4.6	4.6	
46.0				4.2	44.7mx 4.2		3.9			3.9	44.1mx 4.9		4.2			4.6	4.6		4.4	47.0mx 4.3	
48.0							3.7	47.8mx 3.7		3.6			3.5			4.2	47.0mx 4.2		3.8	4.3	4.3
50.0										3.4			3.4			3.4			49.9mx 4.0	4.0	
52.0										3.4			3.1			3.2			3.2	3.4	
54.0										3.4			3.1			3.0			3.0	3.1	
56.0										3.4			3.1			3.0			2.8	2.8	
58.0										3.4			3.1			3.0			2.8	2.7	
60.0										3.4			3.1			3.0			2.8	2.7	



● **Four powerful, independently driven drum winches mounted on dual in-line shafts**

Main and auxiliary drums are located on the left side on front and rear shafts while jib hoist and boom hoist drums are on the right. Each drum is individually driven via a reduction unit from a variable displacement axial piston type hydraulic motor, delivering powerful winch performance.

(Front right drum is optional on applications other than the luffing jib crane.)




● **Power-efficient fully controlled hydraulic system**

Two variable displacement pumps and one gear pump incorporated into the engine provide the most effective application of engine output. Hydraulic flow and pressure are automatically regulated within maximum engine output, delivering high flow and low pressure for lighter loads, low flow and high pressure under heavy loading.



● **Fatigue-free brake operation**


Hydraulically assisted main and auxiliary braking systems allow easy, delicate half-brake control.

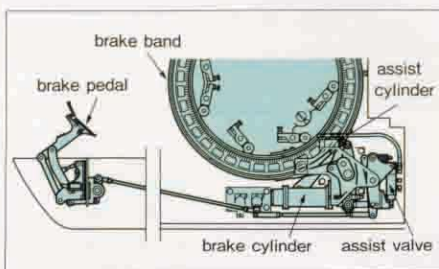

● **Moment limiter (Option)**

The moment limiter has a graphic display with interactive screen. A panel switch lets the operator select from three display modes: load status diagram, rated lifting curve, and rated lifting capacity table.

When the actual load reaches 90% of rated lifting capacity, an intermittent warning buzzer sounds. At 100% of rated capacity, the buzzer sounds continuously, ceasing when load is hoisted or when boom is lowered. The moment limiter uses shockless control valves to slow and then stop the movement of boom or tower jib as they reach minimum or maximum operating angles. Boom angle limitations can be set by the operator, and the display blinks as a warning when these limits are reached.

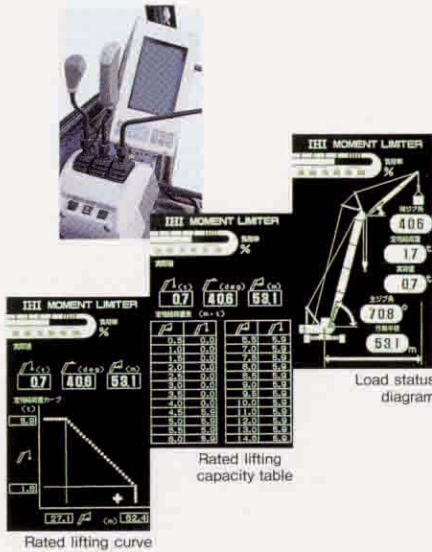

● **Ultra-low-speed control for precision work**

Hydraulic pump delivery volume is controlled in conjunction with engine speed, supplemented by an independent swash-plate angle control dial. Together, these devices provide easy, accurate, seat-side control over delivery volume, for precise inching work.



● **OK monitor**

The OK monitor allows the operator to assess mechanical operating conditions at a glance, without leaving the seat. It includes bar graphs for water temperature, engine oil pressure and hydraulic oil temperature gauges, along with battery charging and air cleaner clogging information.



● **Mode selector switch installed in control lever**

Control levers, pedals and switches are designed for easy operation. One-touch winch mode selector switches (foot/auto braking) are installed in the grips of main and auxiliary drum control levers. And an engine throttle control is built into the grip of the swing control lever, for fingertip command over engine speed.




● **Fuel-efficient automatic engine deceleration system**

With the Auto-Decel selector engaged, the system senses hydraulic pressure, reducing engine speed to idle speed when the crane is inactive.

● **Stacking type counterweights**


Counterweights are stacked on the tail of the turntable, for excellent stability, efficient transport, and safe and easy assembly/disassembly. Weights—seven blocks of up to 14.7 ton—are secured directly to the turntable with pins and wedges.

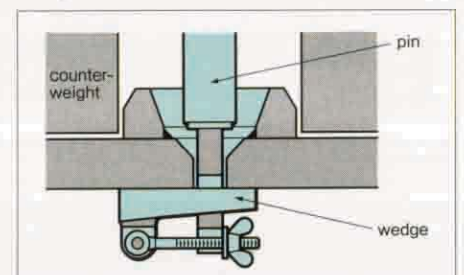

## Self dismantling method for convenient transportation


Attachments, counterweights and crawler frames can be dismantled to lighten the weight, shorten the width and lower the height of the base machine for convenient transportation.

1

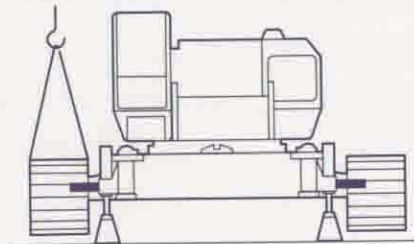


- Remove attachments and counterweights.
- Open and lock jack-up boom (standard equipment)
- Disconnect hydraulic hoses of traction motor drive.
- Set pedestals on firm level ground.
- Lift up base machine slightly by jack-up cylinder.
- Suspend crawler frame (approx. 13ton) with another crane.
- Push out and remove crawler frame by lateral cylinder (standard equipment).

2

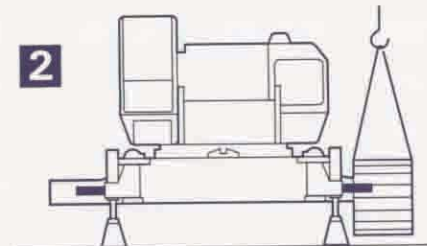


- Follow the same procedures to remove the other side of the crawler frame.

3

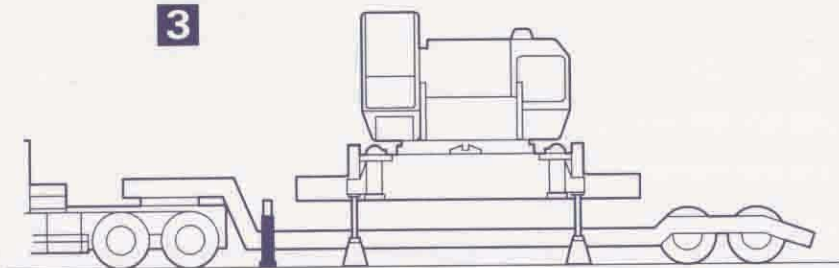


- Lift up base machine by jack-up cylinders to provide enough ground clearance for receiving trailer underneath.

4

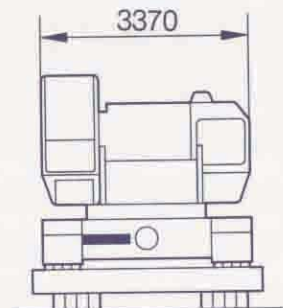

- Retract jack-up cylinders to bring the base machine in contact with the trailer bed, then turn the superstructure 90° to direct the operator's cab in the opposite direction as trailer.

5

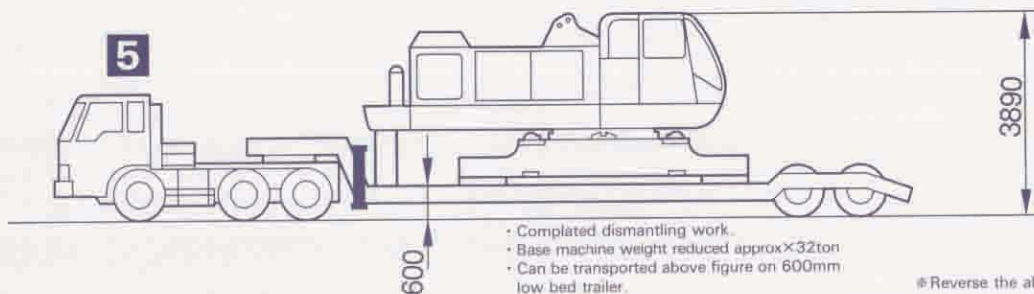

- Completed dismantling work.
- Base machine weight reduced approx. ×32ton
- Can be transported above figure on 600mm low bed trailer.

※ Reverse the above procedures to re-assemble.

### Optional Equipment

Moment limiter (overload prevention)  
 Warning at 90% of rated load  
 Warning at optionally set boom angle  
 Shockless stop, load hoist and boom hoist or lowering at limited condition  
 Insert boom (w/pendant cable) 3m, 6m, 9m  
 13m basic jib, 3m, 6m insert (w/pendant rope)  
 Auxiliary jib  
 60 ton, 50 ton, and 30 ton hook block  
 11 ton hook block for jib  
 Combustion type heater

Air conditioner  
 Wireless phone  
 Yellow rotary light  
 Boom point clearance light  
 Bullhorn  
 Catwalk  
 Catwalk (w/handrail)  
 Offlimit fence  
 Electrical type level indicator  
 Safety guard on boom  
 Reeving winch  
 Hydraulic type tagline

Rope guide roller on boom (additional)  
 Drum roller  
 Name plate (both side of outer boom and cab)  
 Fire extinguisher  
 Flash light for inspection  
 Hoist drum mirror  
 Boom foot pin cylinder  
 Fulcrum plate for rising of attachment  
 Monitor TV (watching rear left and drum)  
 Monitor TV (watching lifting load)  
 Large size tool box with caster  
 Sling wire for disassembling and assembly

# Luffing Tower Crane



**CCH1200**

## Jib rated lifting loads

(Unit : metric ton)

Post length(m) Jib length(m) Post angle Working radius(m)	27.25												39.25												
	23.0			26.0			23.0			26.0			29.0			32.0			35.0			38.0			
	90'	75'	60'	90'	75'	60'	90'	75'	60'	90'	75'	60'	90'	75'	60'	90'	75'	60'	90'	75'	60'	90'	75'	60'	
7.2	20.0			7.7m x 18.0			20.0			7.7m x 18.0			8.2m x 15.0			8.8m x 15.2			9.3m x 14.0			9.8m x 12.0			
10.0	20.0			18.0			20.0			18.0			16.0			15.2			14.0			12.0			
12.0	20.0			18.0			20.0			18.0			16.0			15.2			14.0			12.0			
14.0	20.0			18.0			20.0			18.0			16.0			15.2			14.0			12.0			
15.0	18.0			18.0			18.0			18.0			16.0			15.2			14.0			12.0			
16.0	18.6			16.5			16.6			16.5			16.0			17.0m x 15.2			13.5			12.0			
18.0	14.3	19.8m x 12.8		14.3			14.3			14.3			14.3			14.2			12.5			12.0			
20.0	12.7	12.7		12.7	21.2m x 11.9		12.7			12.7			12.7			12.7			11.4			11.1			
22.0	11.4	11.4		11.4	11.4		11.4	23.0m x 10.8		11.4			11.4			11.4			10.5			10.2			
24.0	10.3	10.3		10.3	10.3		10.3	10.3	24.3m x 10.2	10.3	25.5m x 9.6		10.3			10.3			9.6			9.4			
26.0	25.3m x 9.8	9.5		9.4	9.4		25.3m x 9.8	9.5	9.4	9.4	9.4	9.4	9.4			9.4	26.8m x 9.0		8.8			8.6			
28.0		9.0		8.8	8.8		9.0			8.7	8.7		8.9	8.9		8.5	8.5		8.1	28.1m x 8.0		7.9	29.4m x 7.4		
30.0		8.5	31.4m x 8.2	28.2m x 8.8	8.5		8.5			28.2m x 8.7	8.2		7.9	7.9		7.7	7.7		7.4	7.4		7.2	7.2		
32.0		8.1	8.1		8.2	33.3m x 8.0		8.1			7.7		31.1m x 7.6	7.3		7.0	7.0		6.9	6.9		6.7	6.7		
34.0		32.3m x 8.0	7.8		7.9	7.9		7.8			7.4		6.9			6.6	6.6		6.4	6.4		6.2	6.2		
36.0			7.3		35.2m x 7.6	7.4		35.4m x 7.5	37.4m x 6.7		7.1		6.6			6.2			6.0	6.0		5.8	5.8		
38.0			6.6			6.7		6.5		6.8	39.3m x 6.3		6.4			5.8			36.9m x 5.9	5.7		5.4	5.4		
40.0				38.7m x 6.3		6.3		5.6		38.3m x 6.7	6.0		6.1	41.2m x 5.8		5.5			5.4			39.8m x 5.1	5.1		
42.0						41.6m x 6.0		5.0			5.1		41.2m x 5.8	5.5		5.2	43.2m x 5.0		5.1			4.8			
44.0								4.3			4.3			4.8		4.9	4.9		4.8			45.1m x 4.7	4.6		
46.0									4.3				3.9			3.9			44.1m x 4.9	4.2		4.4	4.4	4.4	47.0m x 4.3
48.0									44.7m x 4.2				47.6m x 3.7			3.6			47.0m x 4.2	3.8		3.4	3.4	3.4	49.9m x 4.0
50.0																3.4			3.4			3.4	3.4	3.4	4.0
52.0																50.6m x 3.4			3.1			3.2	3.2	3.2	3.4
54.0																			53.4m x 3.0			3.0	3.0	3.0	3.1
56.0																						2.8	2.8	2.8	2.7
58.0																						56.3m x 2.8	2.6	2.6	2.7
60.0																								59.2m x 2.6	2.6
62.0																									2.6
64.0																									63.0m x 2.2

Post length(m) Jib length(m) Post angle Working radius(m)	51.25																								
	23.0			26.0			29.0			32.0			35.0			38.0			41.0			44.0			
	90'	75'	60'	90'	75'	60'	90'	75'	60'	90'	80'	70'	90'	80'	70'	90'	80'	70'	90'	80'	70'	90'	80'	70'	
7.2	20.0			7.7m x 18.0			8.2m x 16.0			8.8m x 15.2			9.3m x 14.0			9.8m x 12.0									
10.0	20.0			18.0			16.0			15.2			14.0			12.0			10.3m x 10.0			10.8m x 8.0			
12.0	20.0			18.0			16.0			15.2			14.0			12.0			10.0			8.0			
14.0	20.0			18.0			16.0			15.2			14.0			12.0			10.0			8.0			
15.0	18.0			18.0			16.0			15.2			14.0			12.0			10.0			8.0			
16.0	18.6			16.5			16.0			17.0m x 15.2			13.4			12.0			10.0			8.0			
18.0	14.3			14.3			14.3			14.2			12.2			10.9			10.0			8.0			
20.0	12.7			12.7			12.7			12.7			11.0			9.9			21.0m x 10.0			8.0			
22.0	11.4			11.4			11.4			11.4	23.0m x 10.8		9.8			9.0			9.6			8.0			
24.0	10.3			10.3			10.3			10.3	10.3		8.8			8.1	25.1m x 7.7		8.8			25.0m x 8.0			
26.0	25.3m x 9.8	26.1m x 9.5		9.4	27.4m x 8.9		9.4			9.4	9.4		8.0			7.4	7.4		8.2	26.1m x 8.1		7.7	27.1m x 7.3		
28.0		8.8		8.7	8.7		8.9	28.7m x 8.8		8.5	8.5		7.3			6.7	6.7		7.5	7.5		7.0	7.0		
30.0		8.1		28.2m x 8.7	8.1		7.8	7.8		7.7	7.7		6.7	6.7		6.2	6.2		6.9	6.9		6.3	6.3		
32.0		7.6			7.4		31.1m x 7.1	6.7		7.0			6.2	6.2		5.7	5.7		6.2	6.2		5.7	5.7		
34.0		7.2			6.8			6.2		6.6			5.8	5.8		5.3	5.3		5.7	5.7		5.3	5.3		
36.0		6.8			6.3			6.0		6.2	36.0m x 6.1		5.5	5.5		5.0	5.0		5.3	5.3		5.0	5.0		
38.0		6.3			6.0			5.8		5.8	36.9m x 5.9		5.1	38.1m x 5.1		4.7	4.7		39.6m x 4.5	4.9		4.7	4.7		
40.0			38.5m x 8.1		5.8			5.6		5.5	5.5		4.9	4.9		39.8m x 4.5	4.4		4.4	4.4		4.4	4.4		
42.0				43.4m x 4.0		41.4m x 5.4		5.3		5.2	5.2		4.6	4.6		4.2	4.2		4.3	4.3		4.0	4.1	42.6m x 4.0	
44.0				3.7		45.3m x 3.5		5.0		42.9m x 5.0	4.4		4.3	4.3		4.0	4.0		4.2	4.2		4.1	4.1	3.6	3.9
46.0				3.3		3.3		44.3m x 4.9	47.2m x 2.9		4.0		4.0	4.0		3.8	3.8		3.9	3.9		3.9	3.9	3.7	3.7
48.0				3.1		2.9		2.8		3.8			3.7			3.6	3.6		3.6	3.6		3.6	3.6	3.5	3.5
50.0				3.0		2.7		2.5		3.6			3.4			3.4			48.7m x 3.5	3.4		3.4	3.4	3.4	3.4
52.0					50.7m x 2.9		2.5			2.3			51.4m x 3.5			3.2			51.6m x 3.2	3.2		3.2	3.2	3.2	3.2
54.0							53.6m x 2.4			2.2						3.0			3.0			2.9	2.9	3.1	3.1
56.0										2.1						54.3m x 3.0			2.8			2.7	2.7	54.5m x 3.0	2.9
58.0										56.5m x 2.1								67.2m x 2.8				2.6	2.6	2.6	2.6
60.0																						2.5	2.5	2.4	2.4
62.0																						60.1m x 2.5	2.3	2.3	2.3
64.0																									63.0m x 2.2

Notes  
 1. Above rated loads are based on firm level ground within 78% of tipping load at any point 360° throughout and with front stability of 1.15 or more.  
 2. The actual lifting loads must be reduced following hook block (main and jib) and other lifting devices.  
 For tower jib  
 20 ton hook block---0.75ton  
 11 ton hook block---0.40ton  
 3. Depending on the number of part lines, rated load is limited as follows:  
 1-part line-----up to 11ton  
 2-part line-----up to 20ton  
 4. The angle of the center line of the post and the center line of the jib (offser angle) must not be less than 10°  
 5. The angle of the center line of the jib to level ground (tower jib angle) must not be less than 15° under loaded conditions.  
 6. 11ton hook block can not use with 23m jib.

# Luffing Tower Crane

CCH1200

## Specifications

Max. lifting capacity × working radius		20metric tons × 14m	
Max. lift above ground level		92m(51.25m post + 44m jib)	
Rope speed	Main drum hoist/lowering	* 100~50/50~25m/min	
	Post hoist/lowering	* 60~30m/min	
	Jib hoist/lowering	* 100~50/50~25m/min	
Part line	Main drum hoist	Hook block capacity × Part line	20ton × 2
		Hook block capacity × Part line	11ton × 1
	Post hoist		14
	Jib hoist		8
Counterweight		50ton	
Total operating weight (with 51.25m post + 44m jib + 20ton hook)		135.5ton(Approx.)	
Average ground bearing pressure		1.03kgf/cm <sup>2</sup>	

Note: The rope speed changes depending on the load.

## Combination of post and jib, post angle

Post length(m) Jib length(m)	27.25	30.25	33.25	36.25	39.25	42.25	45.25	48.25	51.25
23	●	●	●	●	●	●	●	●	●
26	●	●	●	●	●	●	●	●	●
29		●	●	●	●	●	●	●	●
32			●	●	●	●	●	●	●
35				●	●	●	●	●	●
38					●	●	●	●	●
41						●	●	●	●
44							●	●	●

Note: ●: Possible combination

## Wire rope

Place of use	Rope diameter (mm)	Guaranteed strength(t)	Rope type
Hook hoist	φ26	61.0	PS(19) + 39 × P·7
Post hoist	φ22	36.3	IWRC6 × WS(31)
Jib hoist	φ26	57.8	T IWRC6 × WS(31)
Post suspension	φ31.5	74.9	IWRC6 × Fi(29)
Jib suspension	φ34	86.7	IWRC6 × Fi(29)
Strut suspension	φ34	86.7	IWRC6 × Fi(29)

Note: Wire rope length to be decided according to the ordered boom length.

## Post Composition



Post length(m)	Post composition(m)
27.25	7.5(inner) + *9+9+1.75(outer)
30.25	7.5 + *9.0+3.0+9.0+1.75
33.25	7.5 + *9.0+6.0+9.0+1.75
36.25	7.5 + *9.0+9.0+9.0+1.75
39.25	7.5 + *9.0+3.0+9.0+9.0+1.75
42.25	7.5 + *9.0+6.0+9.0+9.0+1.75
45.25	7.5 + *9.0+3.0+6.0+9.0+9.0+1.75
48.25	7.5 + *9.0+6.0+6.0+9.0+9.0+1.75
51.25	7.5 + *9.0+3.0+6.0+6.0+9.0+9.0+1.75

Notes  
1.9.0m insert post (\*9.0) is installed to the middle equalizer guide rail  
2.3.0~9.0m insert post including jib strut suspension pendant rope.

## Jib Composition

Jib length(m)	Jib composition(m)
23	8(inner) + 6 + 9(outer)
26	8+3+6+9
29	8+3+9+9
32	8+6+9+9
35	8+9+9+9
38	8+3+9+9+9
41	8+6+9+9+9
44	8+3+6+9+9+9(outer)

## Working range (No load condition)

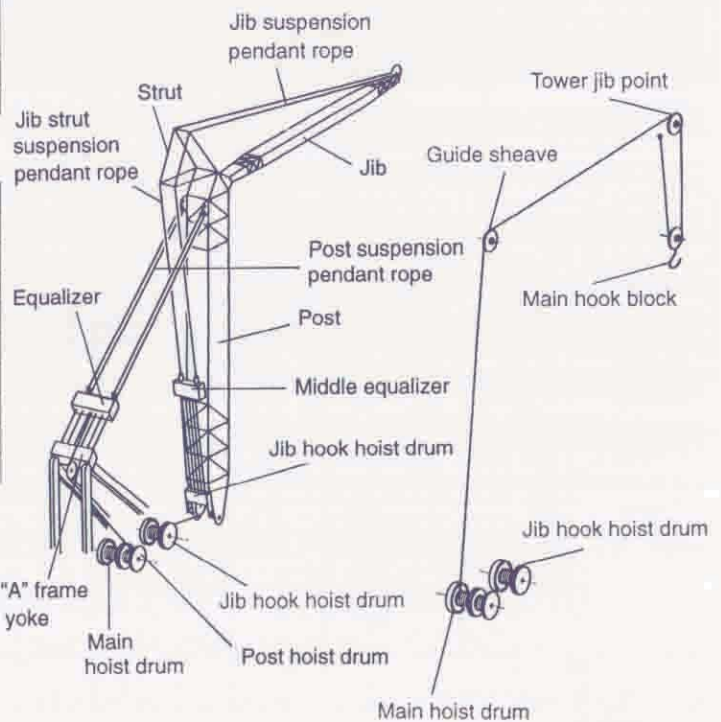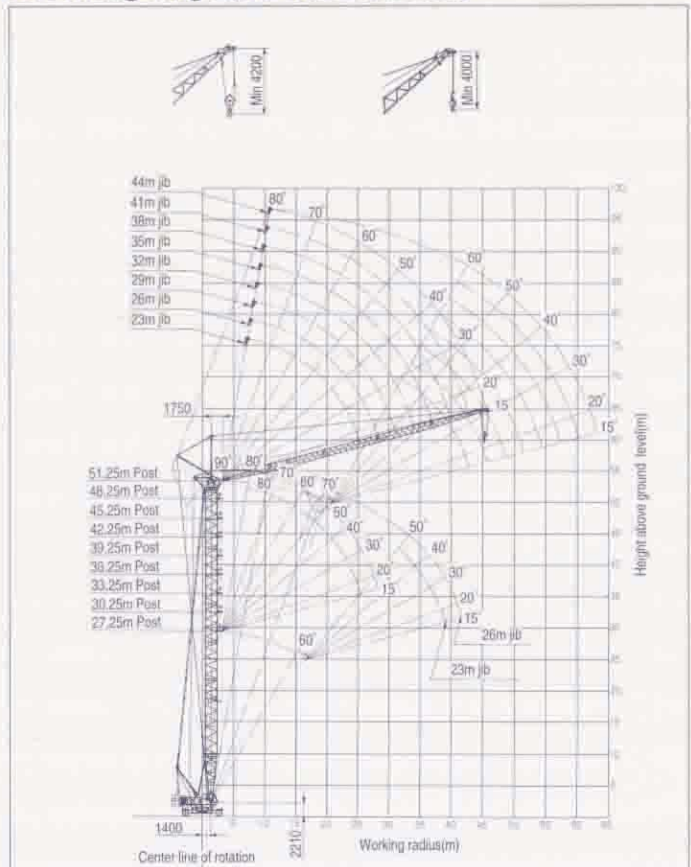

# Luffing Jib Crane

CCH1200



## Post rated lifting loads (without jib)


(Unit : metric ton)


Post length(m)	18.25	21.25	24.25	27.25	30.25	33.25	36.25	39.25	42.25	45.25	48.25	51.25	54.25	57.25	60.25	63.25	66.25
Working radius(m)																	
6.0	6.1m × 40.0	6.6m × 40.0															
7.0	40.0	40.0	7.2m × 40.0	7.7m × 40.0													
8.0	40.0	40.0	40.0	40.0	8.2m × 40.0	8.7m × 40.0											
9.0	40.0	40.0	40.0	40.0	40.0	40.0	9.2m × 40.0	9.8m × 40.0	10.3m × 40.0	10.8m × 40.0							
10.0	11.9m × 40.0	11.9m × 40.0	11.9m × 40.0	11.9m × 40.0	11.9m × 40.0	11.9m × 40.0	11.8m × 40.0	11.8m × 40.0	11.8m × 40.0	11.8m × 40.0	11.3m × 30.0	11.8m × 30.0					
12.0	39.8	39.7	39.6	39.5	39.4	39.3	39.2	39.1	39.0	38.9	30.0	30.0	12.4m × 30.0	12.9m × 30.0	13.4m × 25.0	13.9m × 18.0	
14.0	32.1	32.0	31.9	31.8	31.7	31.6	31.5	31.4	31.3	31.2	14.3m × 30.0	14.3m × 30.0	14.2m × 30.0	14.2m × 30.0	25.0	18.0	14.4m × 13.0
16.0	26.7	26.6	26.5	26.4	26.3	26.2	26.1	26.0	25.9	25.8	25.7	25.5	25.4	25.3	16.1m × 25.0	18.0	13.0
18.0	22.8	22.7	22.6	22.5	22.3	22.2	22.1	22.0	21.9	21.8	21.7	21.6	21.4	21.3	21.3	18.0	13.0
20.0	18.8m × 27.8	19.6	19.5	19.4	19.3	19.2	19.1	19.0	18.8	18.7	18.6	18.5	18.4	18.3	18.2	20.1m × 18.0	13.0
22.0		21.2m × 18.1	17.1	17.0	16.9	16.8	16.6	16.5	16.4	16.3	16.2	16.1	15.9	15.8	15.7	15.6	13.0
24.0			23.7m × 15.4	15.0	14.9	14.8	14.7	14.6	14.4	14.3	14.2	14.1	14.0	13.9	13.8	13.7	24.7m × 13.0
26.0				13.4	13.3	13.2	13.0	12.9	12.8	12.7	12.6	12.4	12.3	12.2	12.1	12.0	11.9
28.0				26.3m × 13.2	11.9	11.8	11.7	11.6	11.4	11.3	11.2	11.1	10.9	10.8	10.7	10.6	10.5
30.0					28.9m × 11.4	10.6	10.5	10.4	10.3	10.1	10.0	9.9	9.8	9.7	9.6	9.5	9.4
32.0						31.5m × 9.9	9.5	9.4	9.2	9.1	9.0	8.9	8.7	8.6	8.5	8.4	8.3
34.0							8.6	8.5	8.4	8.2	8.1	8.0	7.9	7.8	7.7	7.6	7.5
36.0							34.1m × 8.5	7.7	7.6	7.5	7.3	7.2	7.1	7.0	6.9	6.8	6.7
38.0								36.7m × 7.5	6.9	6.8	6.6	6.5	6.4	6.3	6.2	6.1	6.0
40.0									39.3m × 6.5	6.2	6.0	5.9	5.8	5.7	5.6	5.5	5.4
42.0										41.9m × 5.5	5.5	5.4	5.2	5.1	5.0	4.9	4.8
44.0											5.0	4.9	4.7	4.6	4.5	4.4	4.2
46.0											44.5m × 4.9	4.4	4.2	4.1	3.9	3.8	3.7
48.0												47.1m × 4.1	3.7	3.6	3.4	3.3	3.2
50.0													49.7m × 3.3	3.1	3.0	2.8	2.7
52.0														2.7	2.6	2.4	2.3
54.0														52.3m × 2.6	2.2	2.0	1.9

### Notes

- Above rated loads are based on firm level ground, within 78% of tipping load at any point 360° throughout and with front stability of 1.15 or more.
- The actual lifting loads must be reduced following hook block (main and jib) and other lifting devices.  
 1ton hook block--0.40ton    40ton hook block--0.95ton  
 30ton hook block--0.75ton
- Depending on the number of part lines, rated load is limited as follows:  
 1-part line---up to 11.0ton  
 2-part line---up to 20.0ton  
 3-part line---up to 30.0ton  
 4-part line---up to 40.0ton

## Working range (No load condition)

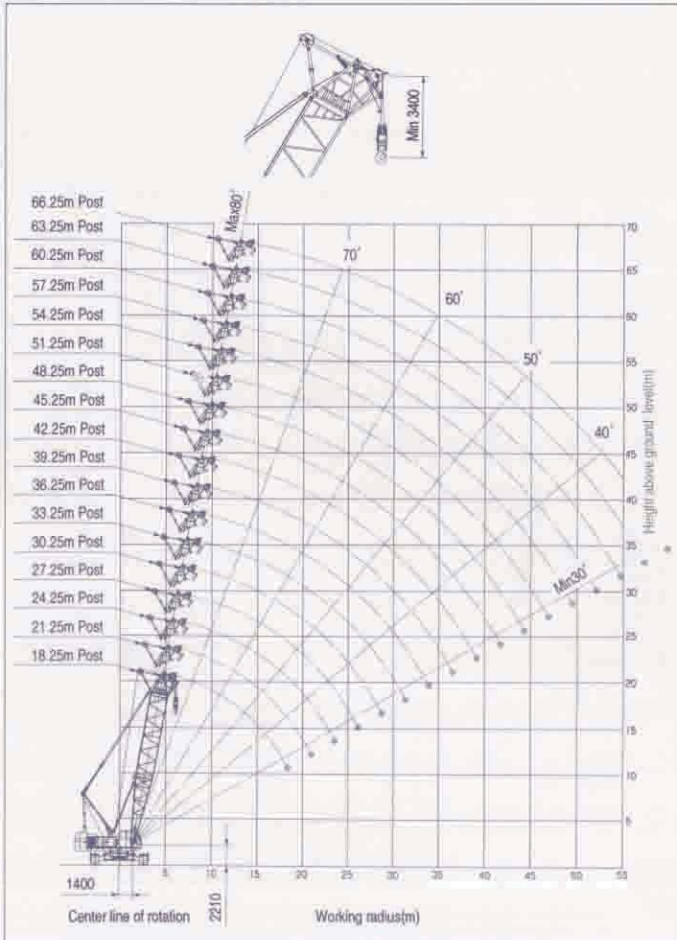

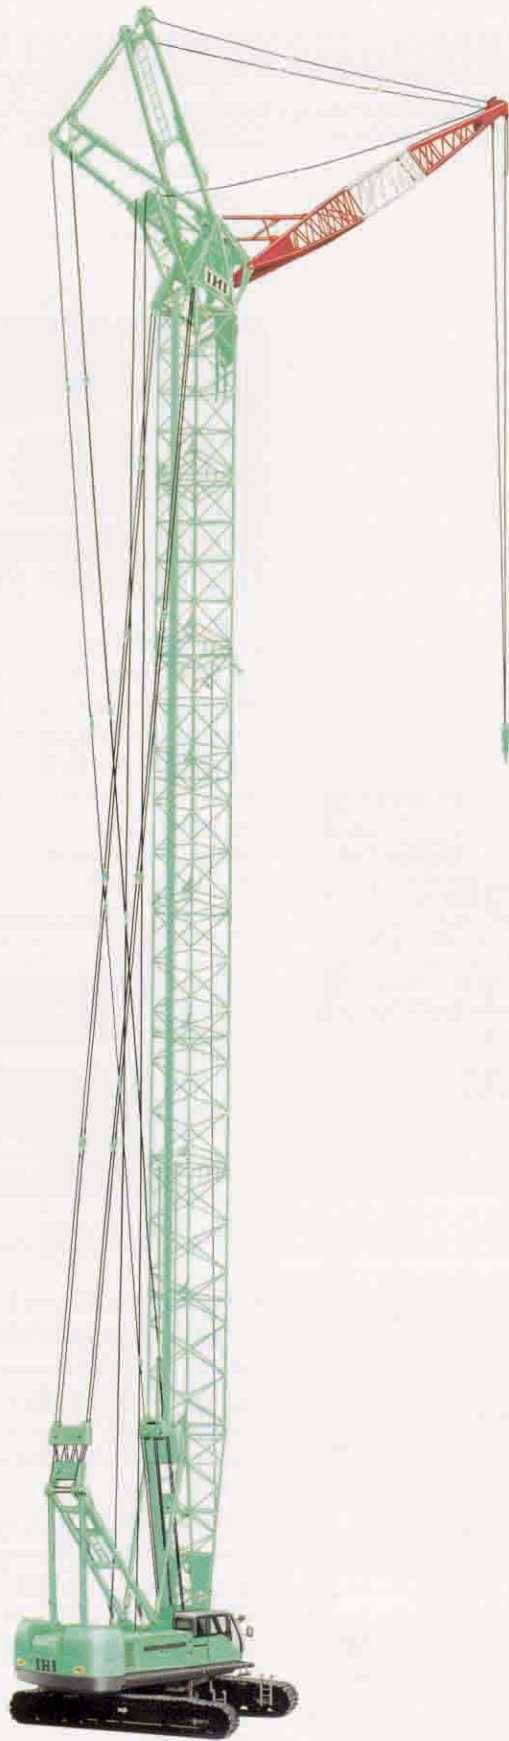

IHI

