

**AVAILABLE  
FOR HIRE**



**SMS PARS 80 Fixed Side Clamp Vibratory Hammer**  
with

**Pre-Auger Drill Attachment**

**On a Hyundai HX330L**

**Available for Hire Nationwide**

**Contact the Rental Team for rates and availability**

**Tel: 01789 292227**

**E-mail: [rental@agd-equipment.co.uk](mailto:rental@agd-equipment.co.uk)**

**For more information about AGD please visit [www.agd-equipment.co.uk](http://www.agd-equipment.co.uk)**




## Hyundai HX330L

Engine Make / Model	Cummins QSL9
Re-Filling	Litre
Fuel Tank	600
Engine Coolant	55
Engine Oil	30
Swing Device	11
Final Drive (each Tank)	7.8
Hydraulic Tank	414
DEF/AdBlue	210
Gradeability	42.5
	35° (70%)



Transport Weight (Ex Attachments) (Kg)	34,450
Operating Weight including SMS (Kg)	37,950

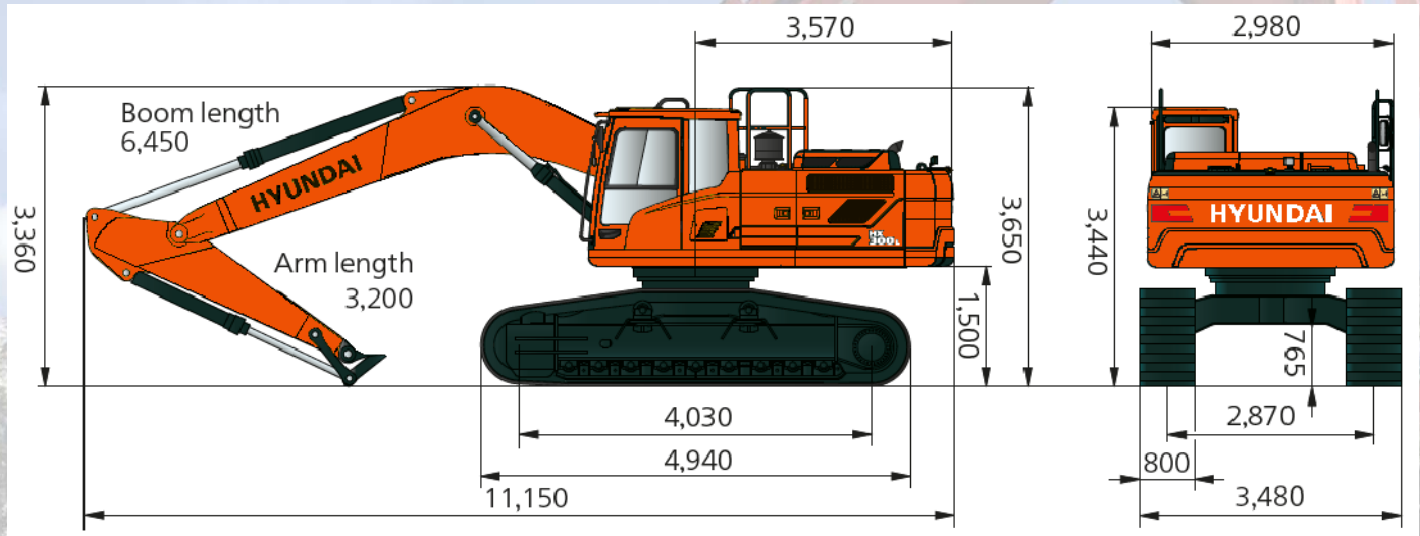

## SMS PARS 80 Fixed Side Clamp

Centrifugal Force (kN)	604		
Total Weight (Kg) *Excluding Adaptor	3,500		
Total Length (mm)	1,350		
Total Width (mm)	1,422		
Total Height (mm)	2,560		
Flow (Lt/min)	240		
Working Pressure (bar)	300		
Rotation-Swing Angles (°)	360-30		
Sheet Piles	400 - 1200mm	12/16m Length	Max 2,850 Kg
H Beam	H180 - H500	12/16m Length	Max 2,850 Kg
Tubular Pile, Tubes	244 - 762mm	12/16m Length	Max 2,850 Kg
Wood Piles	150 - 630 mm	8/10/12m Length	Max 2,850 Kg



## ABI BA 1200 Dangle Drill

Torque	daNm	1,200
Revolutions Max	min	73
Static Extraction Force Max	kN	120
Hydraulic Flow Rate	l/min	220
Required Oil Quantity per Rotation	l/min	3
Max Hydraulic Power and Auger Drive	kW	90
Nominal Oil Pressure	MPa	30
Transport Weight	kg	500
Hexagon Connection	mm	80
Auger Diameter	mm	300
Height (Transport)	mm	1,480 (1,270)
Width (Transport)	mm	515 (800)
Length (Transport)	mm	440 (710)

