


Anvil™  
(Yaun-Williams™ Type)

# GP-S

## GENERAL PURPOSE CLAMSHELL BUCKETS - SINGLE SHAFT

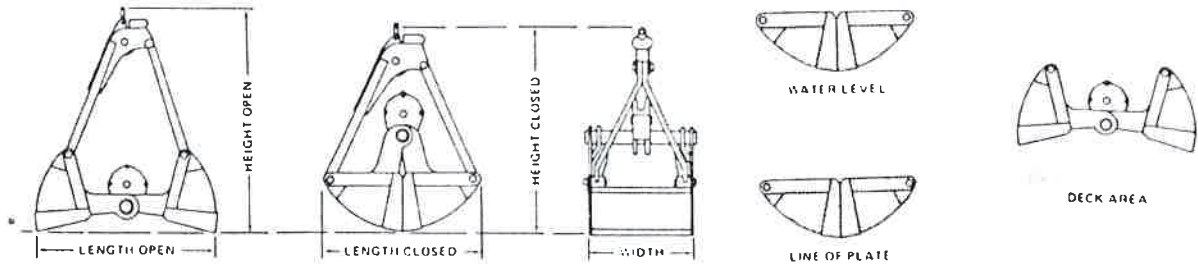

### SPECIFICATIONS

SIZE NUMBER		GP38S	GP12S	GP58S	GP34S	GP100S
RATING - CU. YDS.		3/8	1/2	5/8	3/4	1
CAPACITY - CU. FT.	Water Level	8.0	11.3	15.0	15.6	22.0
	Line of Plate	11.0	15.8	21.9	22.2	31.0
DECK AREA - SQ. FT.		13.0	15.2	16.9	20.0	26.1
DIMENSIONS	Width Outside	2'7.3"	2'7.8"	2'8"	3'0"	3'4"
	Length Open	5'0"	5'9"	6'4"	6'8"	7'10"
	Length Closed	4'2"	4'8"	5'0"	5'4"	6'0"
	Height Open	7'0"	7'3"	7'7"	7'8"	9'2"
	Height Closed	5'8"	6'0"	6'3"	6'4"	7'8"
SHEAVES - O.D.		12"	12"	12"	14"	14"
ROPE	Standard Diameter	1/2"	1/2"	1/2"	3/4"	3/4"
	To Reeve - Open	38'0"	42'0"	42'0"	51'0"	53'0"
	Pulled Out To Close	18'6"	25'0"	26'0"	28'0"	29'0"
BOTTOM TEETH - QTY.	Square Nose	5	5	5	6	6
	Round Nose	5	5	5	6	6
WEIGHT - SQ. NOSE	Bucket Only	1,580	1,800	2,100	2,800	3,690
	Bottom Teeth With Std. Cwt. and Teeth	150 1,880	150 2,125	150 2,470	175 3,205	175 4,225

### SPECIFICATIONS

SIZE NUMBER		GP114S	GP112S	GP200S	GP212S	GP300S
RATING - CU. YDS.		1-1/4	1-1/2	2	2-1/2	3
CAPACITY - CU. FT.	Water Level	27.6	34.3	44.0	52.0	59.0
	Line of Plate	37.0	46.2	61.2	75.4	90.0
DECK AREA - SQ. FT.		29.5	36.1	39.4	43.1	43.5
DIMENSIONS	Width Outside	3'6.5"	4'2"	4'4.5"	4'5"	4'5.5"
	Length Open	8.4"	8'8"	9'0"	9'8"	9'9"
	Length Closed	6'8"	6'9"	7'2"	7'9"	8'0"
	Height Open	9'5"	9'6"	9'10"	11'4"	11'6"
	Height Closed	7'10"	7'10"	8'2"	9'7"	9'8"
SHEAVES - O.D.		16"	16"	16"	18"	18"
ROPE	Standard Diameter	7/8"	7/8"	7/8"	1"	1"
	To Reeve - Open	55'6"	57'0"	60'0"	67'0"	67'4"
	Pulled Out To Close	30'6"	32'0"	33'6"	43'6"	43'6"
BOTTOM TEETH - QTY.	Square Nose	6	6	6	8	8
	Round Nose	6	6	6	8	8
WEIGHT - SQ. NOSE	Bucket Only	4,000	5,100	5,900	7,750	8,000
	Bottom Teeth With Std. Cwt. and Teeth	175 4,555	175 5,760	360 6,770	480 8,760	480 9,080

For sizes not listed, call Intergy, Inc.

Because of normal variances in the material used, the weight of an actual bucket may vary slightly from that listed in the data table.

The above data is for square nose buckets. Information for round nose buckets is approximately the same.

Sheaves, sockets and wedges provided for rope size as shown above unless otherwise specified.

**ANVIL™ OWEN™ YAUN-WILLIAMS™**



attachments

Engineered and marketed by

**INTERGY, INC.**

P.O. Box 418051 • Brecksville, Ohio 44141-8051  
(216) 526-1167 Telex: 98-0467